



**CHIKOUSA**  
RACKING MADE SIMPLE



## About us

Chiko's origins date back to 2007, founded with a focus on technological advancement and cost reduction, specializing in providing manufactured solar mounting solutions for utilities, commercial, industrial, and residential projects. Headquartered in Shanghai China, Chiko has set up offices, warehouses, and manufacturing facilities in several countries including Australia, the United States, Mexico, the Netherlands, South Africa, the United Arab Emirates, India, Thailand, Vietnam, the Philippines, and Korea. Chiko creates value and cost savings for customers!

With over 18GW of product installations completed in more than two-dozen countries, Chiko's products have provided proven performance in a wide variety of environmental conditions. While becoming one of the largest solar racking providers in the world Chiko's focus will continue to be on our customer's first!



# History

**2021.**  
**18GW Milestone**

**2020.**  
**12GW Milestone**

**2019.**  
**Solar Tracking Launched**

**2018.**  
**Set up Offices in the United States and Korea**

**2016-2017.**  
**Development of product options to support US Markets**

**2015.**  
**4GW Milestone**

**2012.~2015**  
**Set Up Offices in Australia,  
Netherlands, & Thailand**


**2011.**  
**Acquired Certifications For  
Mounting Products**

**2010.**  
**Foundation Chiko Solar Specializes  
In Solar Mounting Structure**

**2007.**  
**Founded As Solar Power Venture**

# Certification

Chiko R&D team, of more than 10 peoples, 4 designers and 7 civil engineers leading by the doctor who registered as the 1st class structural engineer in China, is the members of various international organizations to set the standards for our products. Currently, Chiko products owns several certifications by the third parties, such as: SGS, Gamcorp, Intertek, and SPAD etc. We Continuously accelerate the developing of new products and technologies, from its strength in fixed solar mounting to solar tracking system and energy storages.



## Patents





# Production

Chiko strives towards high operational efficiency, resulting in lower operational costs. Currently, we operate two manufacturing facilities in Shanghai and Suqian. Both of these facilities total 30,000 square meters, (322,917 square feet), consisting of 8 production lines which allow Chiko to maintain 8GW of annual capacity for aluminum and steel manufacturing and production. In early 2020, our focus has been increasing automation within our facilities impacting our automation processing, machining, cleaning and packing. These technological automation advancements will allow Chiko to maintain our leading position in the solar industry.



# Culture

## Mission:

- Adhere to innovation
- To meet customers' requirements
- To win global market
- To keep excellent and professional
- To build first-class green energy CHIKO brand

## Value:

- Communication
- Win-win Benefits
- Cooperation,
- Service
- Competition

## Spirit:

- Professional focus
- Full participation;
- Great unity,
- Open and profound mind

## Vision:

- Sincere credibility and top-level of service
- Scientific standard and high-quality of products






# Index

» TILE ROOF MOUNT BRACKET .....	1-8
<ul style="list-style-type: none"><li>Pantile Mount Side Fixing</li><li>Pantile Mount Bottom Fixing</li><li>Flat Tile Mount</li><li>Crown Mount</li><li>Asphalt Shingle Mount</li><li>Standoff Mount</li><li>Stainless Steel Hook</li></ul>	
» METAL ROOF MOUNT BRACKET .....	9-16
<ul style="list-style-type: none"><li>L Feet Mount</li><li>Hanger Bolt Mount</li><li>Trapezoidal Clamp Mount</li><li>Rail-Free Mount</li><li>Lysaght Klip-lok Mount</li><li>E-LOCK Mount</li><li>Tilt Mount</li><li>Standing Seam Clamps</li></ul>	
» FLAT ROOF MOUNT BRACKET .....	17-24
<ul style="list-style-type: none"><li>Ballast I-2 Mount</li><li>Ballast I-3 Mount</li><li>Ballast III Mount</li><li>Ballast VI Mount</li><li>Adjustable Aluminum Triangular Mount</li><li>Fixed Aluminum Triangular Mount</li><li>Classic Rail #7</li><li>Infit Rail</li></ul>	
» GROUND MOUNT .....	25-31
<ul style="list-style-type: none"><li>Aluminum T2VC Mount</li><li>Steel U2V Mount</li><li>Steel Pipe Mount</li><li>Pile-Driven Mount</li><li>Single Pole Carport</li><li>Four Poles Carport</li><li>Adjustable Steel Ground Mount</li></ul>	
» ROOFTOP GROUNDING .....	32
» GROUND SCREW & ANCHOR .....	33-34
» CABLE ACCESSORY .....	35-37
<ul style="list-style-type: none"><li>Cable Clip</li><li>Stainless steel cable tie</li><li>PV Connectou</li><li>PV Cable</li></ul>	
» PROJECTS REFERENCE .....	38-40

## Pantile Mount Side Fixing

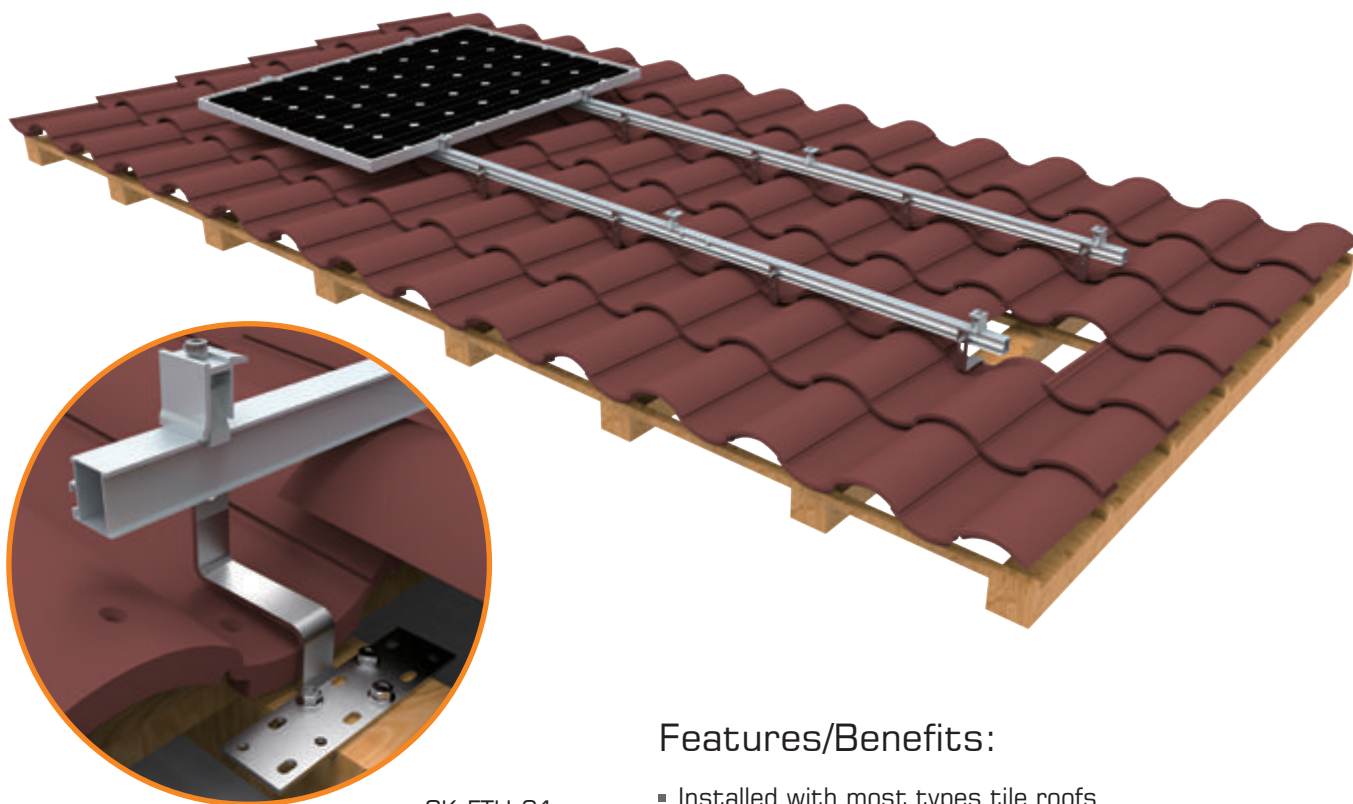


CK-FTH-01

### Features/Benefits:

- Installed with most types tile roofs
- Portrait & Landscape orientation
- Pre-assembled
- Made of SUS 304
- Height adjustable
- Easy installation




### Portrait Orientation




CK-FTH-01

### Landscape Orientation



CK-FTH-01B



### Height Adjustable



CK-FTH-09



## Pantile Mount Bottom Fixing

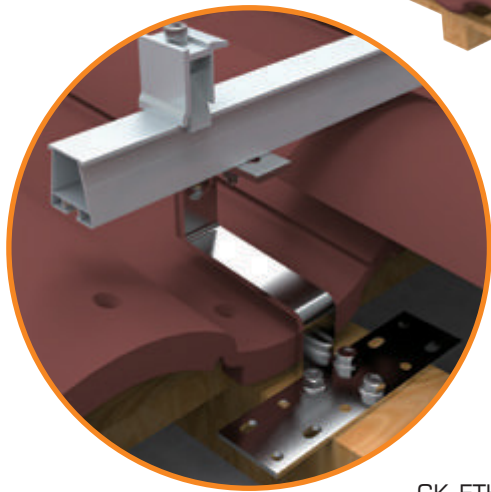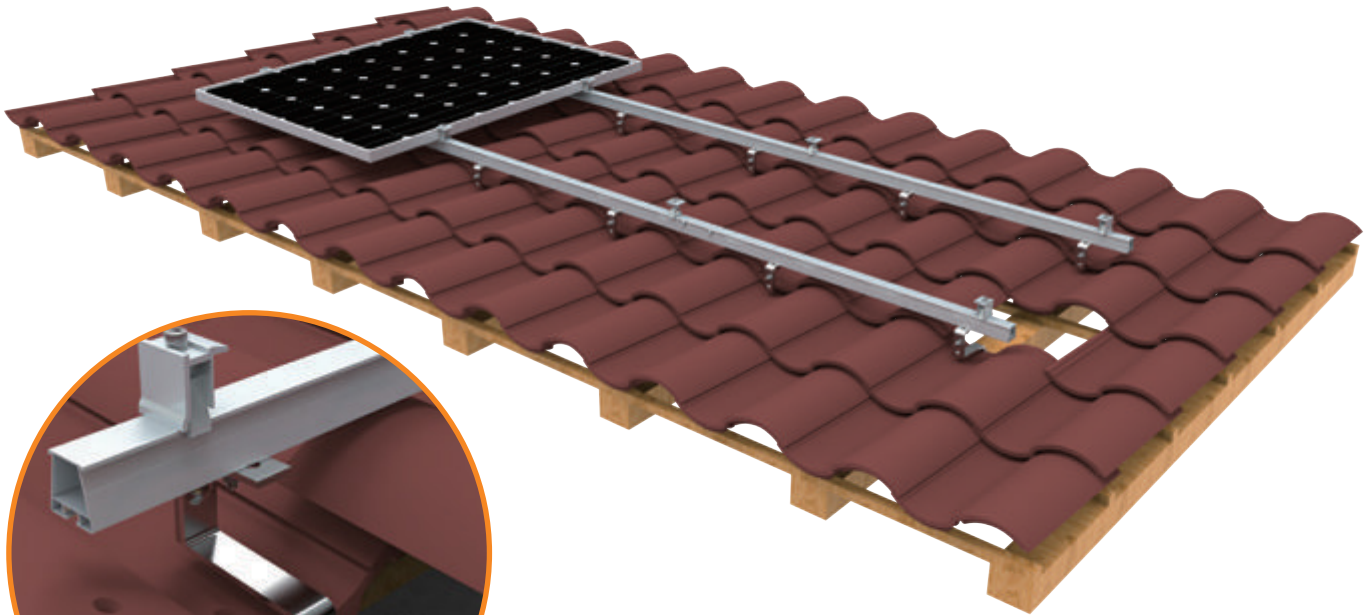


CK-FTH-073

### Features/Benefits:

- Installed with most types tile roofs
- Portrait & Landscape orientation
- Pre-assembled
- Made of SUS 304
- Height adjustable
- Easy installation
- Firmly bottom fixing




### Height adjustable over tile




CK-FTH-073

### Height adjustable at batten



CK-FTH-09V

## Flat Tile Mount

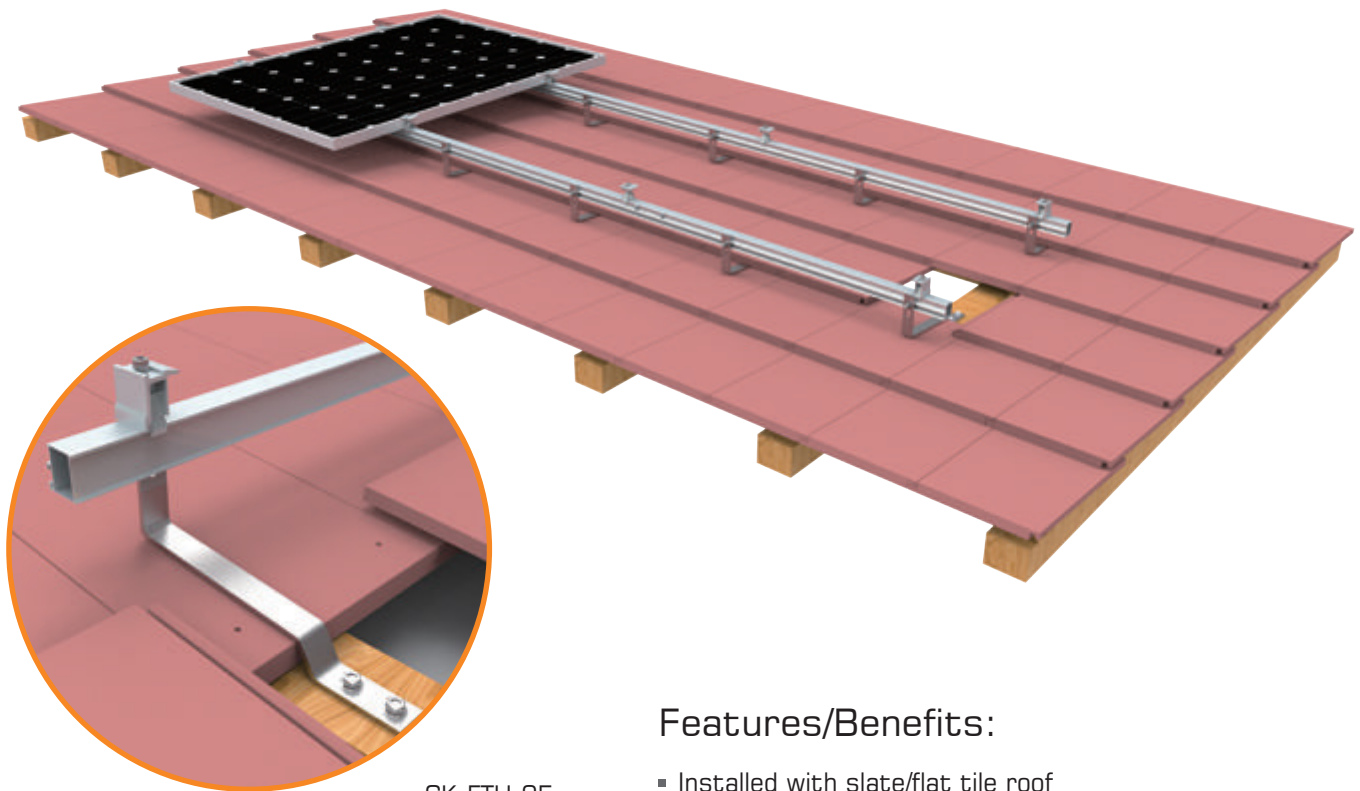


CK-FTH-05



### Features/Benefits:


- Installed with slate/flat tile roof
- Portrait & Landscape orientation
- Pre-assembled
- Made of SUS 304
- Height adjustable
- Easy installation

### Portrait orientation



CK-FTH-05


### Landscape orientation



CK-FTH-05B



## Crown Mount

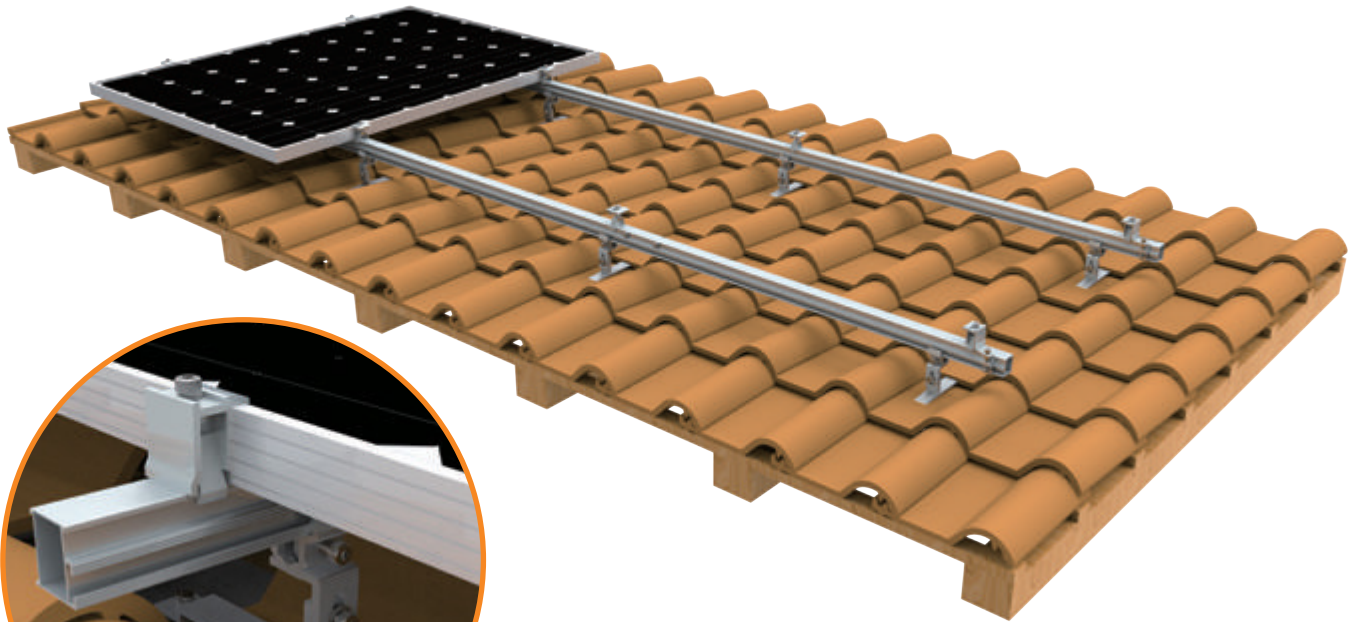


CK-FTS-385

### Features/Benefits:

- Bottom carrying of rail achieved easily by side fastening
- Module orientation switched easily by rotatable adapter
- Made of AL 6005-T5
- High-class surface anodizing
- Pre-assembled
- Height adjustable




## Tulip Mount

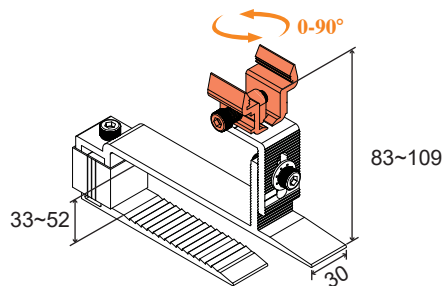


CK-FTS-385

## Arc Mount



CK-FTS-360

## Asphalt Shingle Mount

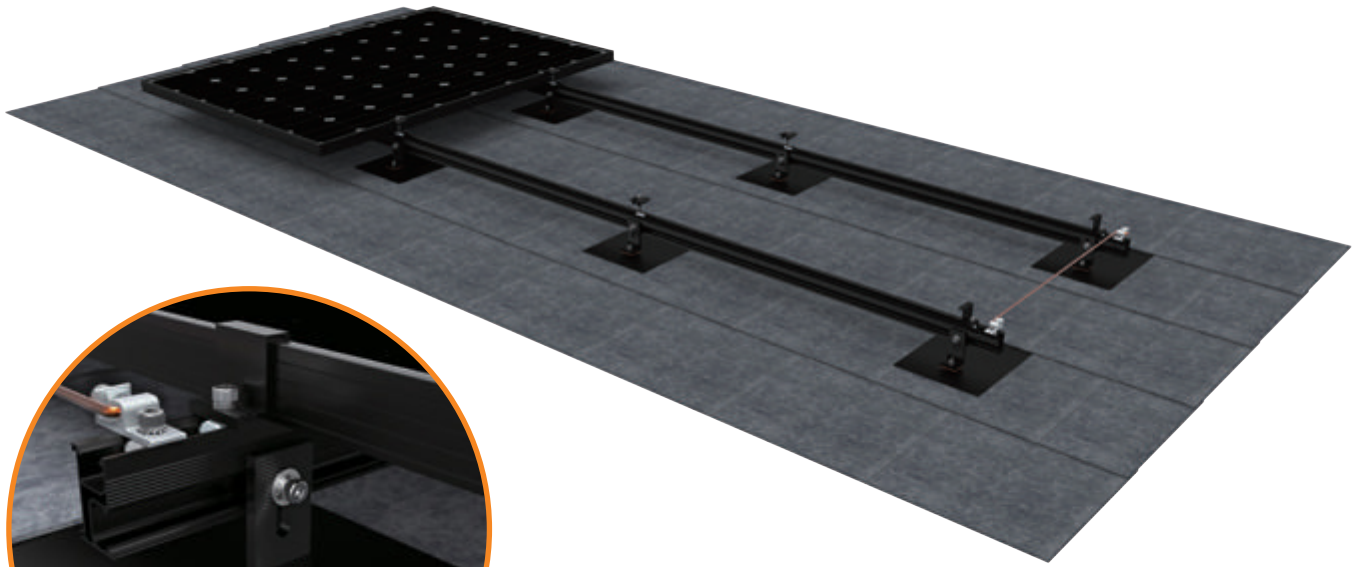


CK-FTS-162T2-5




### Features/Benefits:

- Installed with Asphalt Shingle Roof
- Portrait and Landscape orientation
- Made of AL 6005-T5
- High-class surface anodizing
- Pre-assembled
- Waterproof silicon rubber and flashing integrated
- Easy installation

### Specifications

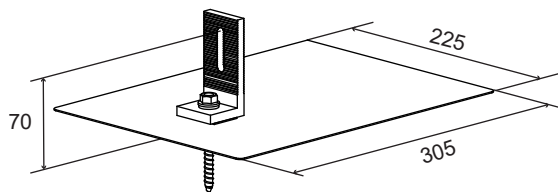


### Waterproofing

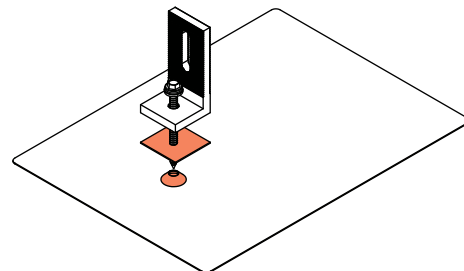



## Standoff Mount

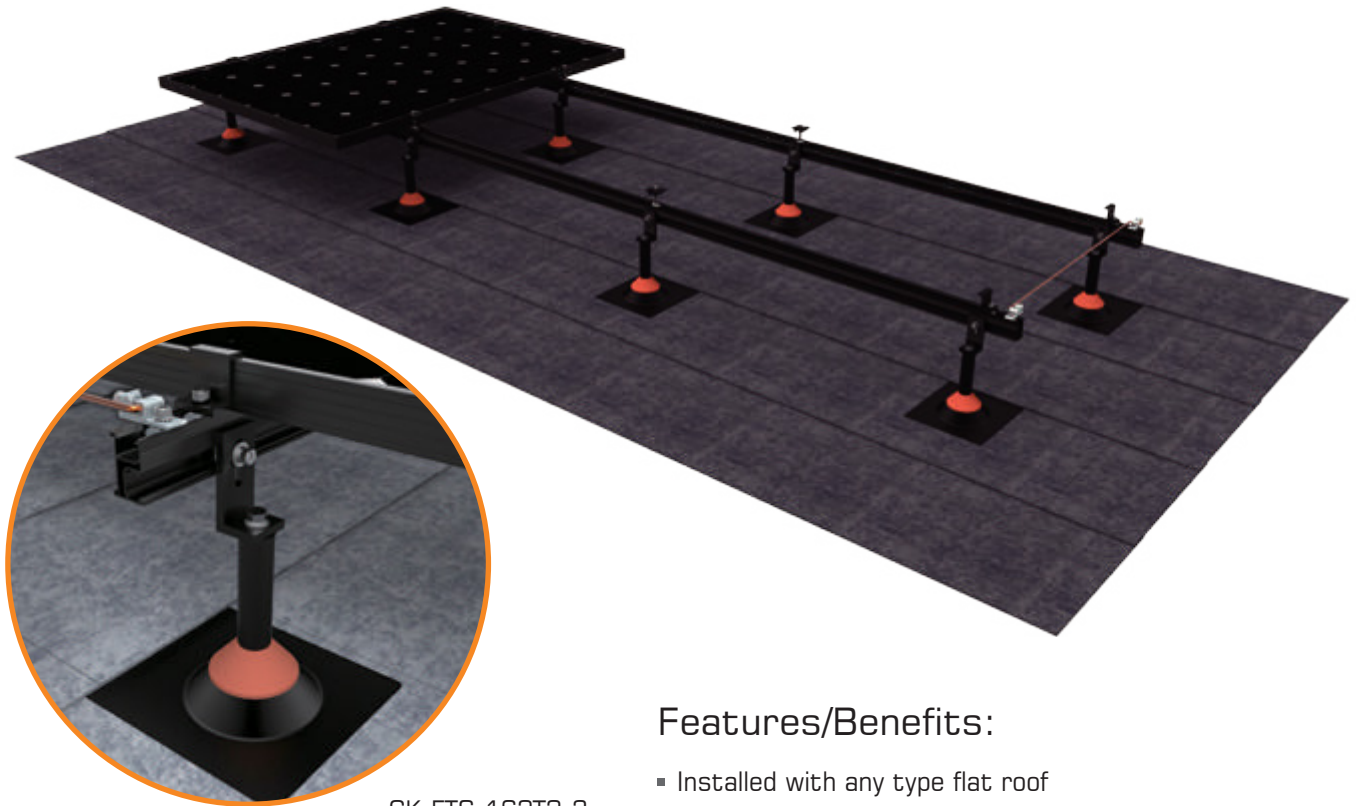


CK-FTS-162T2-3




### Features/Benefits:

- Installed with any type flat roof
- Portrait and Landscape orientation
- Made of AL 6005-T5
- High-class surface anodizing
- Pre-assembled
- Waterproof silicon rubber and flashing integrated
- Different Height available
- Easy installation

### Height Options

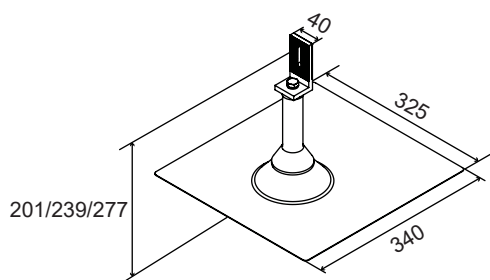























### Waterproofing

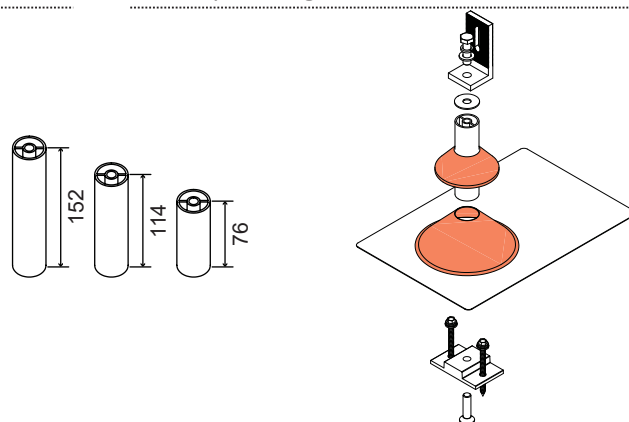

## Stainless Steel Hook


Type No.	Image	Technical	Dimensions	Tile Roof Type
CK-FTH-01			H1=46 H2=147 W=180	
CK-FTH-78			H1=66~98 H2=101 W=180	
CK-FTH-09			H1=41~51 H2=99 W=140	
CK-FTH-79			H1=41~51 H2=99 W=140	
CK-FTH-01B			H1=46 H2=147 W=180	
CK-FTH-09B			H1=41~51 H2=99 W=140	
CK-FTH-73			H1=50 H2=72~101 W=180	
CK-FTH-09V			H1=40~50 H2=60~72 W=140	

Type No.	Image	Technical	Dimensions	Tile Roof Type
CK-FTH-05			H1=30 H2=100 W=30	
CK-FTH-81			H1=30 H2=100 W=30	
CK-FTH-05B			H1=30 H2=100 W=30	
CK-FTH-07			H=101 W=30	
CK-FTH-07B			H=101 W=30	
CK-FTH-61			H=75 W=30	

Pantile	Roman tile	Flat tile	Asphalt Shingle
			



## L Feet Mount

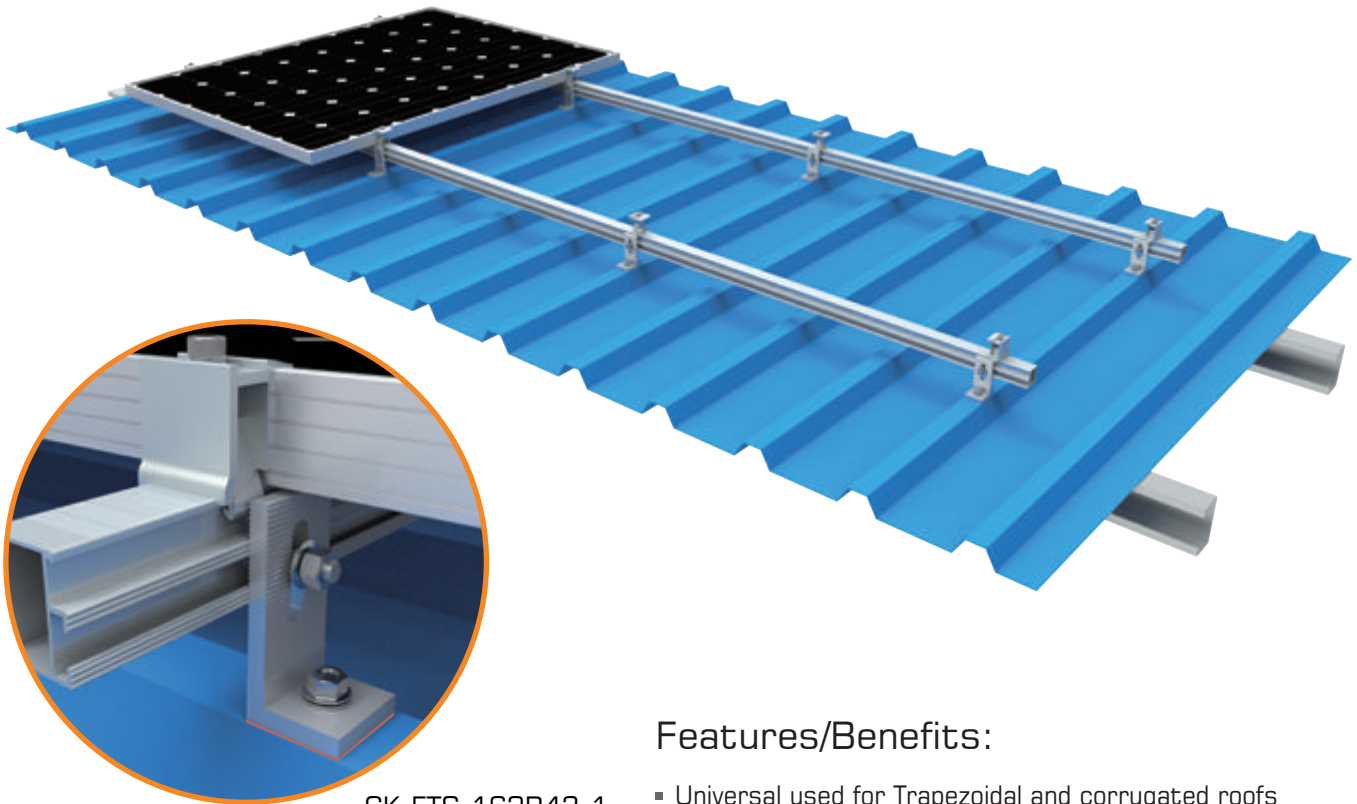

CK-FTS-162R43-1

### Features/Benefits:

- Universal used for Trapezoidal and corrugated roofs
- Portrait or Landscape orientation
- Pre-assembled
- Made of high class material AL6005-T5
- Pre-Applied EPDM pad




Length Options

Apply with Hanger Bolt

Work with roof clamps



## Hanger Bolt Mount

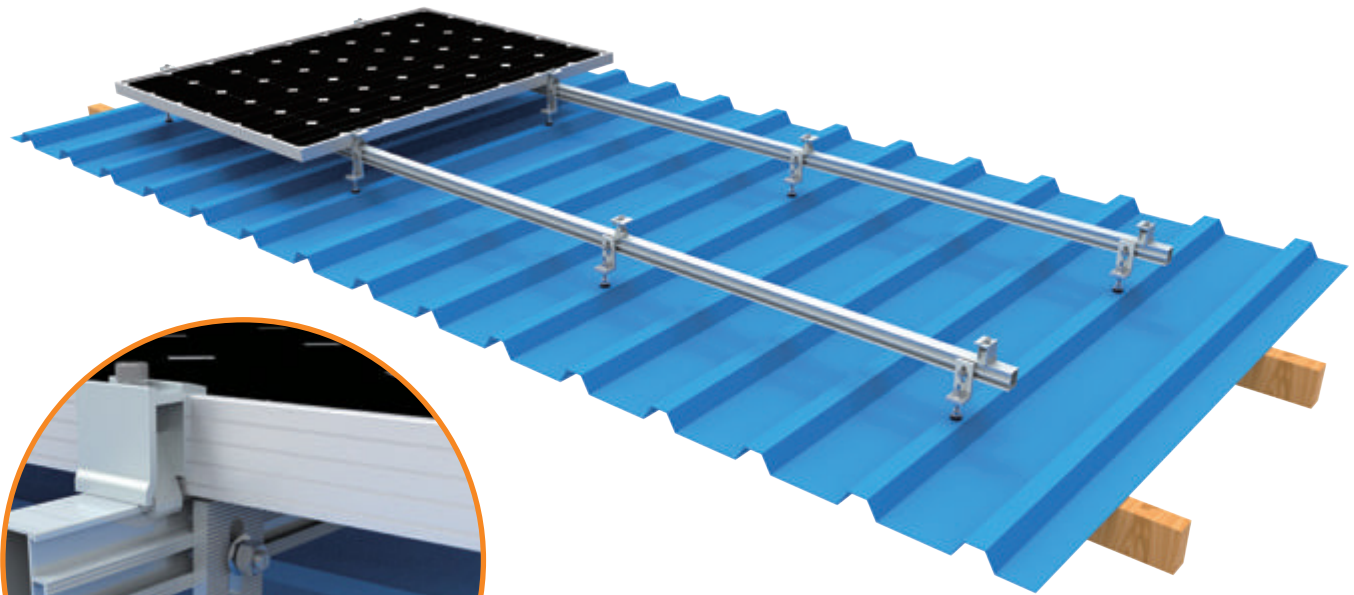

CK-FTS-162R43-7



### Features/Benefits:

- Universal used for fibre-cement, trapezoidal and corrugated roofs
- Portrait or Landscape orientation
- Pre-assembled
- Made of high class material AL6005-T5
- Height adjustable and help to increase power generation

For Wooden Rafter

For Steel Purlin

Combined with Alu Plate





CK-HS-003-B1200/250/300



CK-HS-001-C120/160/200



## Trapezoidal Clamp Mount

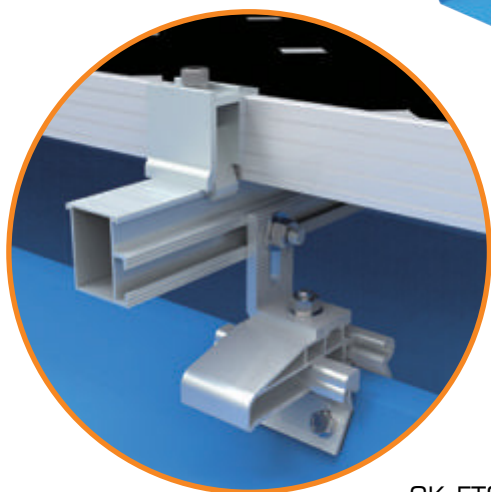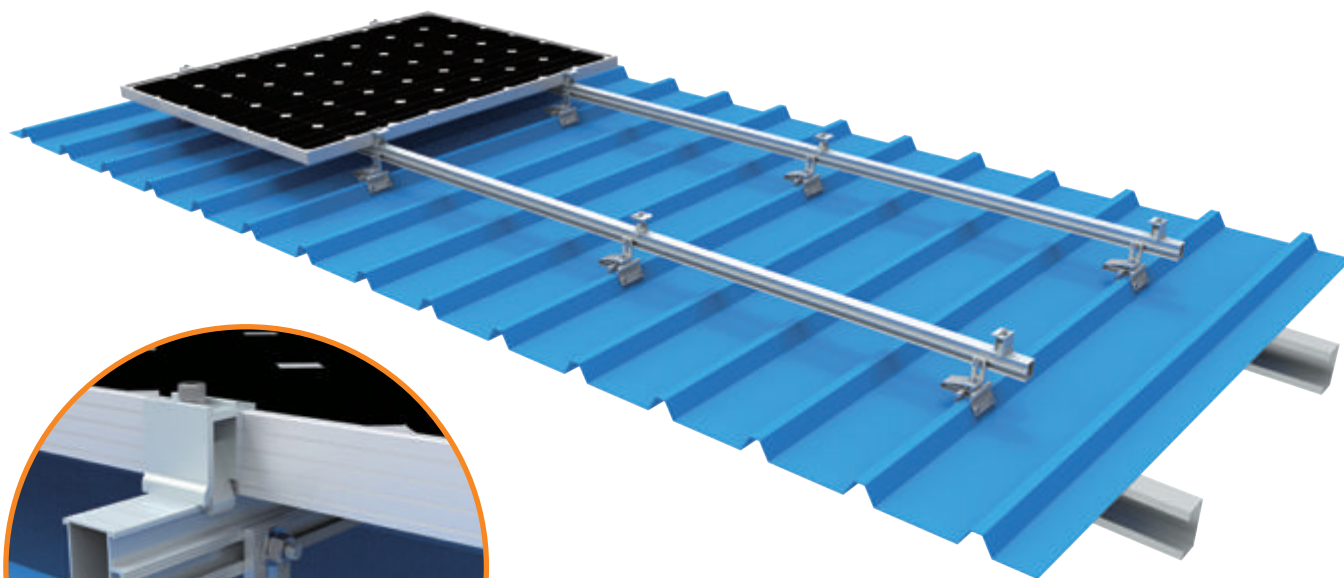

CK-FTS-384

### Features/Benefits:

- Application on the trapezoidal roof profile
- Portrait or Landscape orientation
- Made of high class material AL6005-T5
- Every size of module array possible
- Components configured completely, no need extra parts purchasing
- Share the roof loading



### Top Drilling



CK-FTS-320



CK-FTS-352

### Side Drilling





CK-FTS-381



CK-FTS-395



## Rail-Free Mount

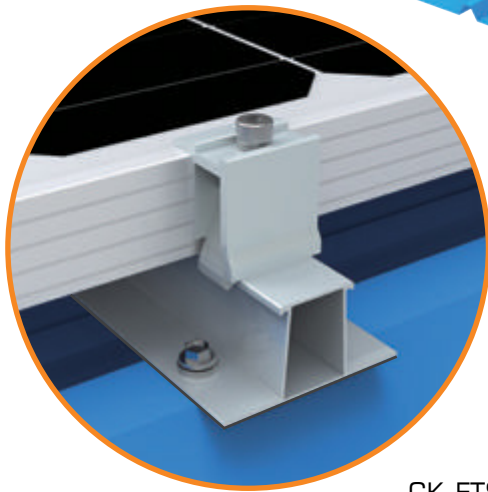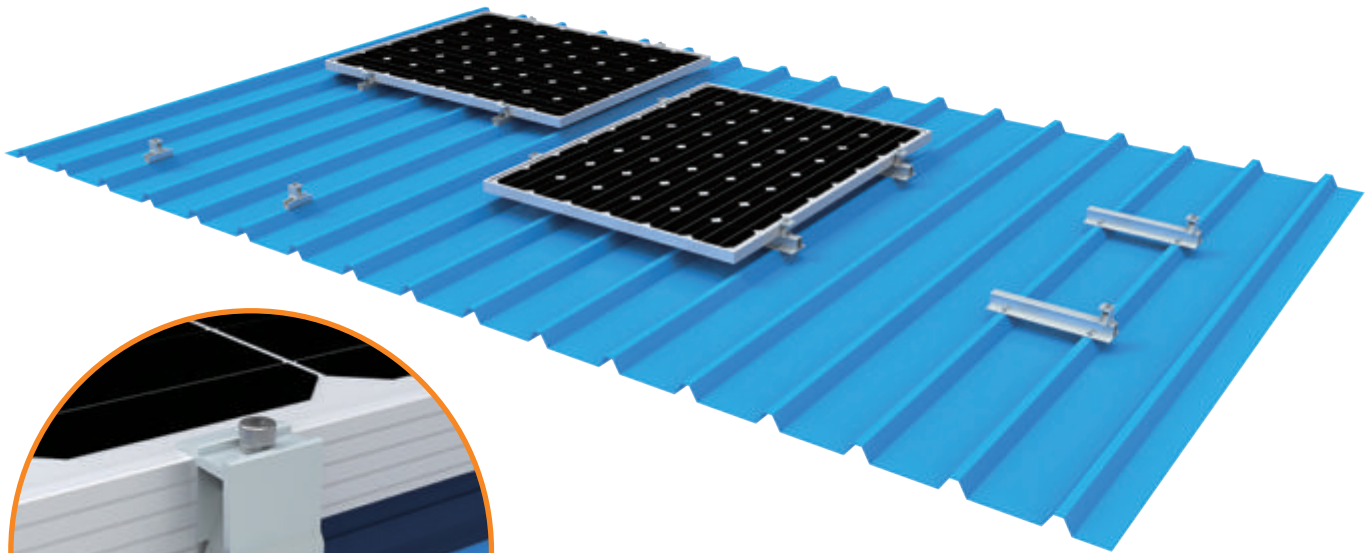


CK-FTS-017



### Features/Benefits:

- Application on the trapezoidal and Sandwich roof profile
- Portrait orientation
- Made of high class material AL6005-T5
- Lower Costing & Fast fixing
- Fix on ribs only ,no need drill purlin
- Pre-assembled with EPDM pad

### Different height for option

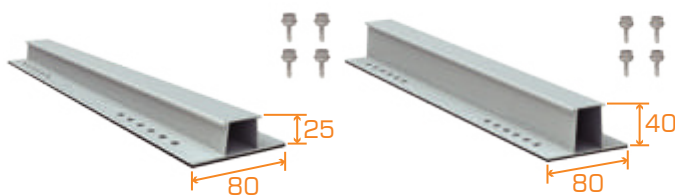

CK-FTS-016

CK-FTS-017



### Portrait&Landscape Orientation



CK-FTS-022

CK-FTS-012

## Lysaght Klip-lok Mount

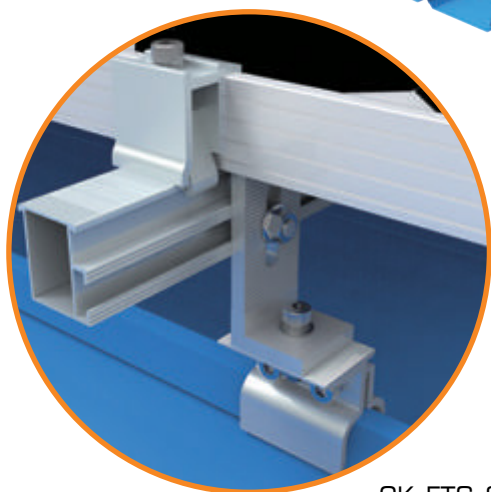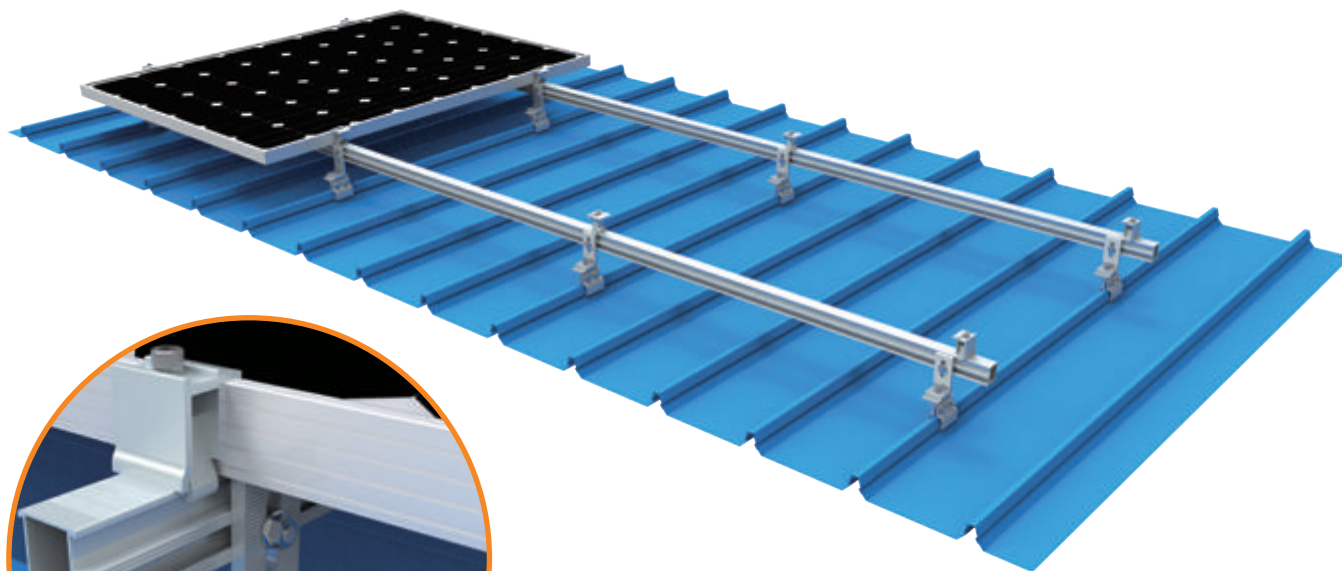

CK-FTS-370/371

### Features/Benefits:

- Application on the Lysaght Klip-lok 406 & 700
- Portrait or Landscape orientation
- Made of high class material AL6005-T5
- Every size of module array possible
- Share the roof loading
- Non-penetration installation



### Klip-lok Series



CK-FTS-370





CK-FTS-351



CK-FTS-336

## E-LOCK Mount

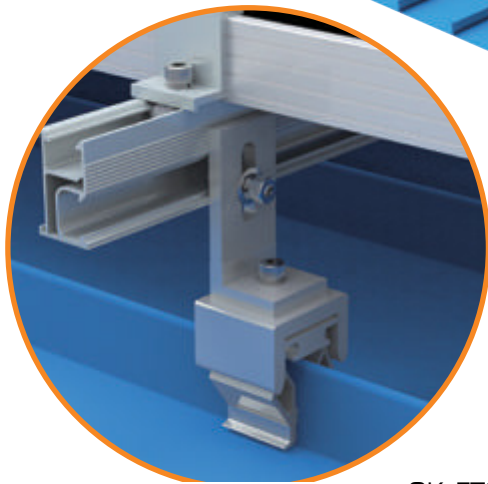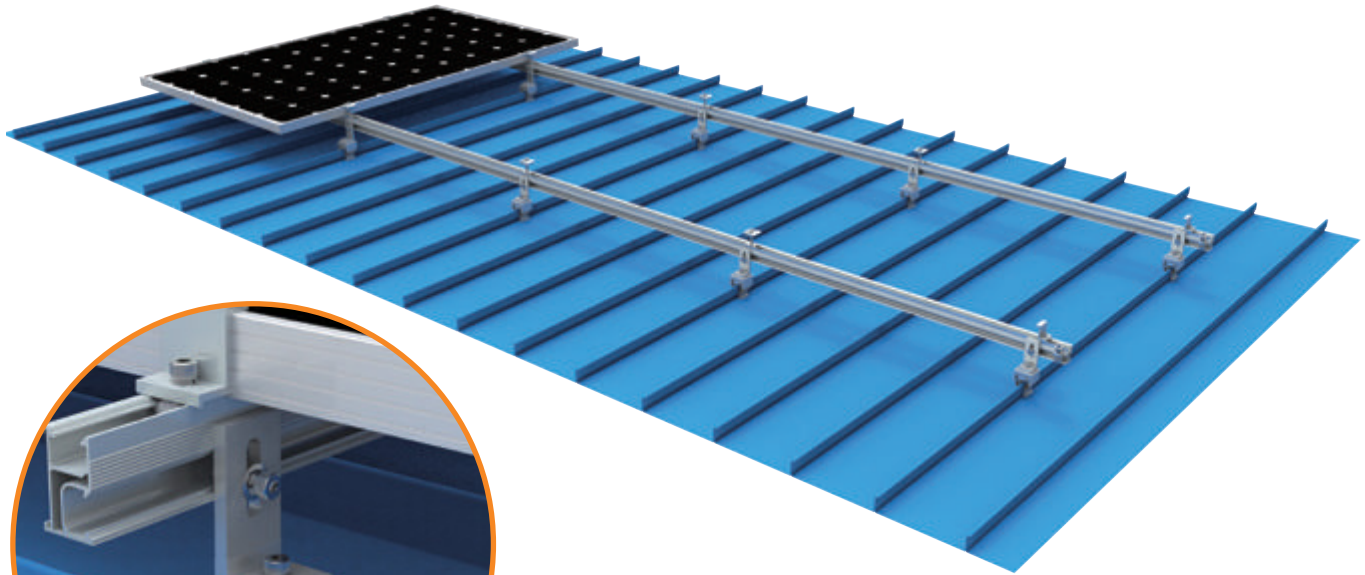

CK-FTS-388

**intertek**  
Total Quality. Assured.

### Features/Benefits:

- Used on different seam roofs
- Portrait and Landscape orientation
- Made of high class material AL6005-T5
- One bolts fixing ,saving installation time and process
- Unique design with non-penetrating solutions

### Customized Shapes For Roofing Profiles



CK-FTS-389




CK-FTS-376



CK-FTS-388



## Tilt Mount

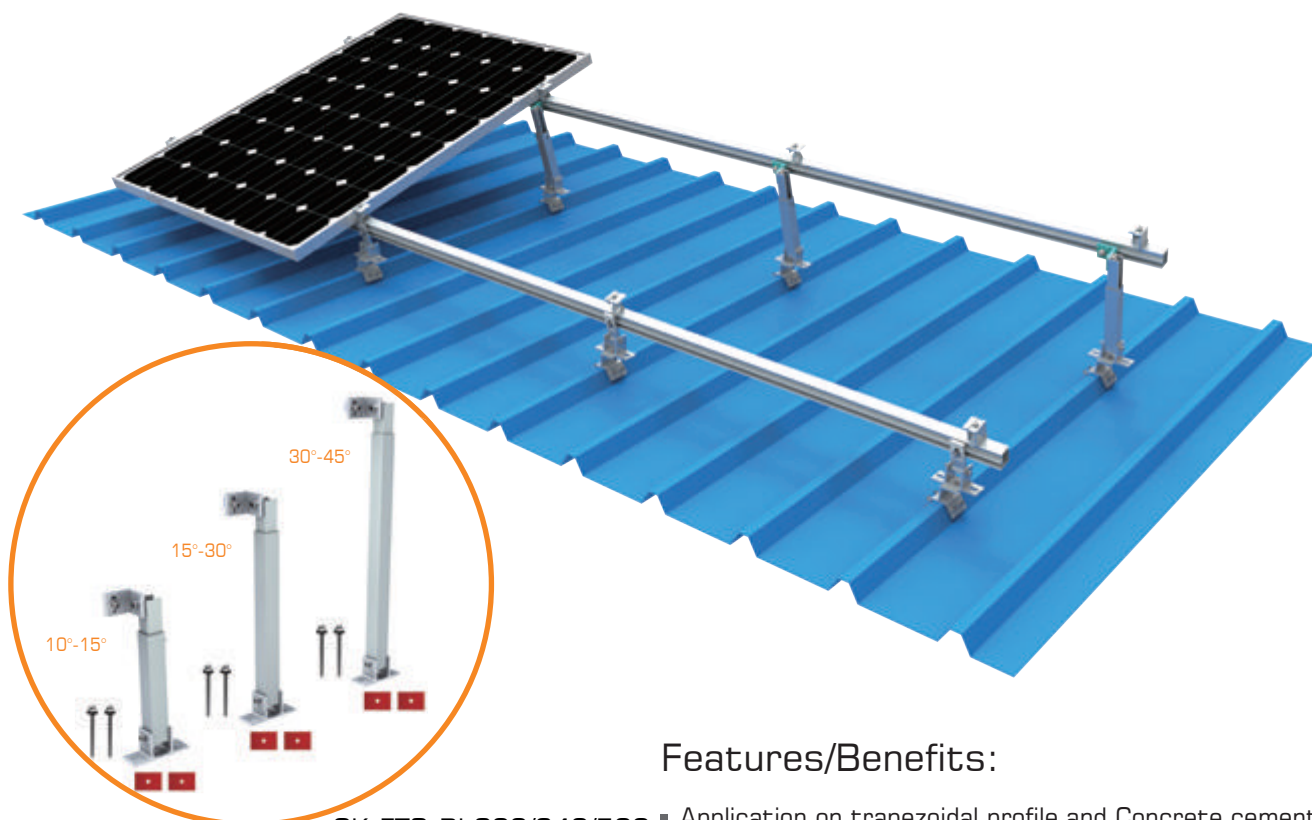

CK-FTS-BL200/340/500

### Features/Benefits:



- Application on trapezoidal profile and Concrete cement roofs
- Portrait or Landscape orientation
- Made of high class material AL6005-T5
- Different tilt options
- Optimizing the tilt to increase power generations


















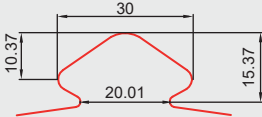
L footing

Combined with roof clamp


Free direction possible

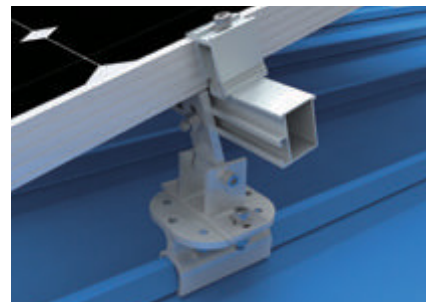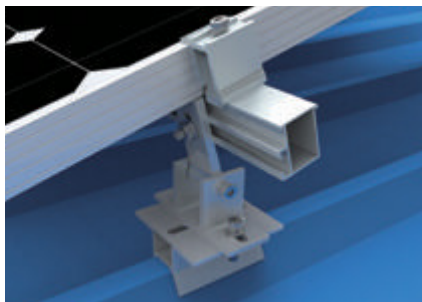

## Standing Seam Clamps

Type No.	Image	Profile reference	Material
CK-FTS-371			AL 6005-T5
CK-FTS-370			AL 6005-T5
CK-FTS-351			AL 6005-T5
CK-FTS-336			AL 6005-T5
CK-FTS-365			AL 6005-T5
CK-FTS-331			AL 6005-T5
CK-FTS-349			AL 6005-T5
CK-FTS-355			AL 6005-T5

## Ballast I-2 Mount

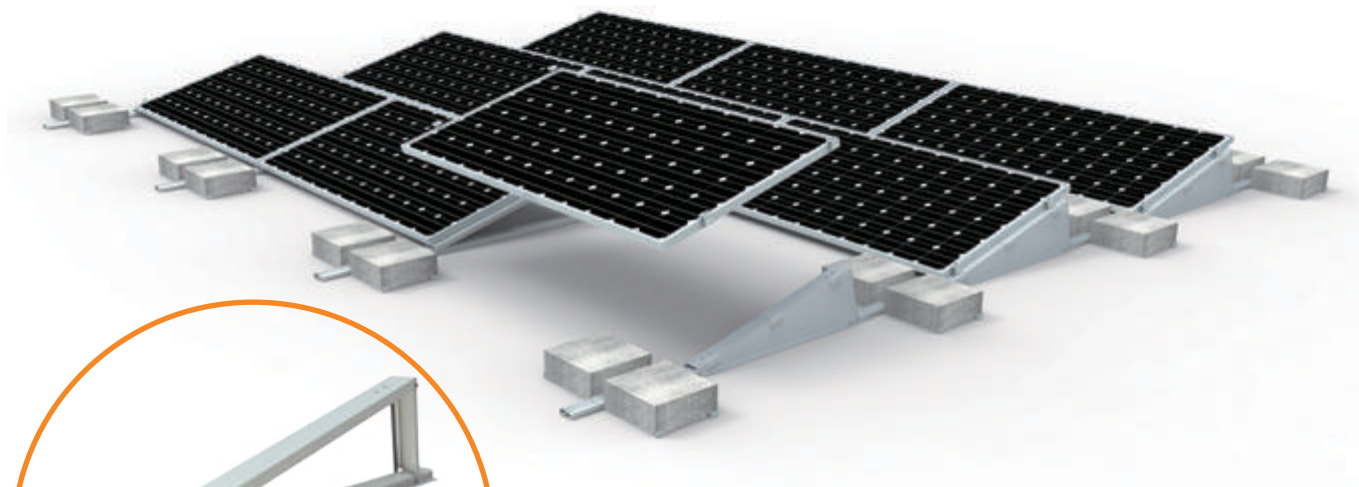



CK-BT21

### Features/Benefits:



- Most universal for commercial flat roofs
- 1 panel Landscape orientation & East to West
- 10°, 15°, 20°, 25°, 30° tilted angle available
- Various modules configurations are possible
- Made of AL 6005-T5
- Highly class anodizing on surface treatment
- Pre-assembly and foldable
- Non-penetration to roof and light weight roof loading



### East to West Configurations:

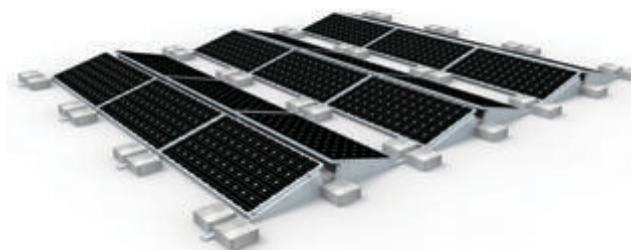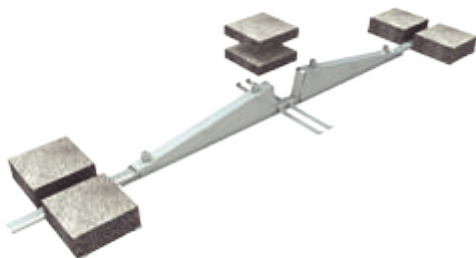

## Ballast I-3 Mount

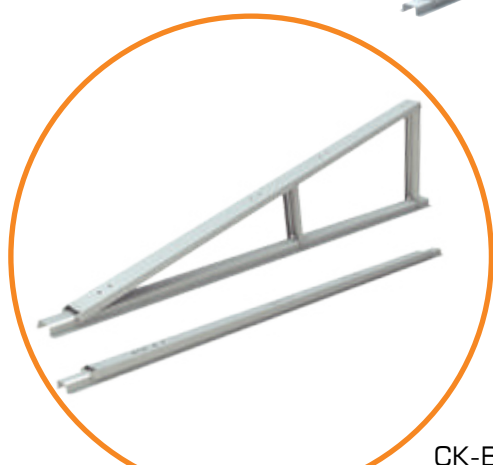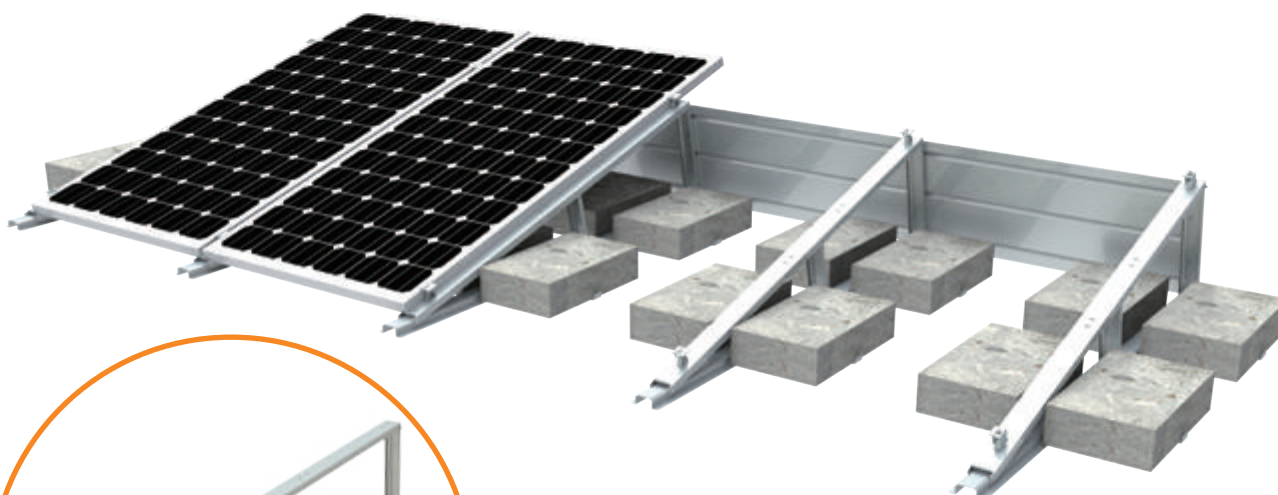


CK-BT31



### Features/Benefits:

- Most universal for commercial flat roofs
- 1 panel Portrait & 2 panels Landscape orientation
- 10°, 15°, 20°, 25°, 30° tilted angle available
- Various modules configurations are possible
- Made of AL 6005-T5
- Highly class anodizing on surface treatment
- Pre-assembly and foldable
- Non-penetration to roof and light weight roof loading

## Customized Configurations

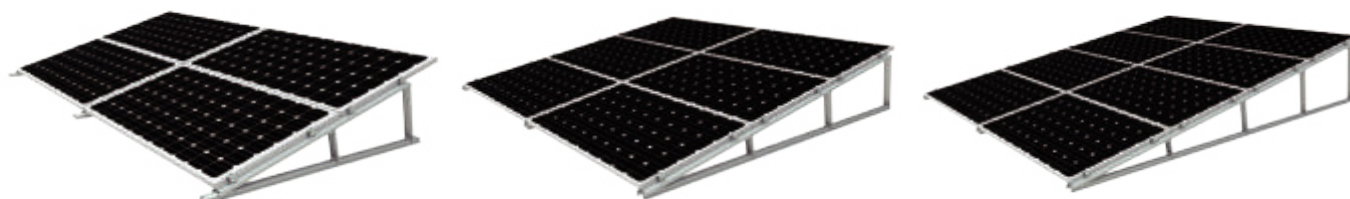



## Ballast III Mount



CK-BL-3




### Features/Benefits:

- Most cost-effective for commercial flat roofs
- 1 panel Landscape orientation
- 10°, 15°, 20°, 25°, 30° tilted angle available
- Various modules configurations are possible
- Made of Aluminum
- 1 step installation
- Non-penetration to roof and light weight roof loading

## Simple Installations




## Ballast VI Mount

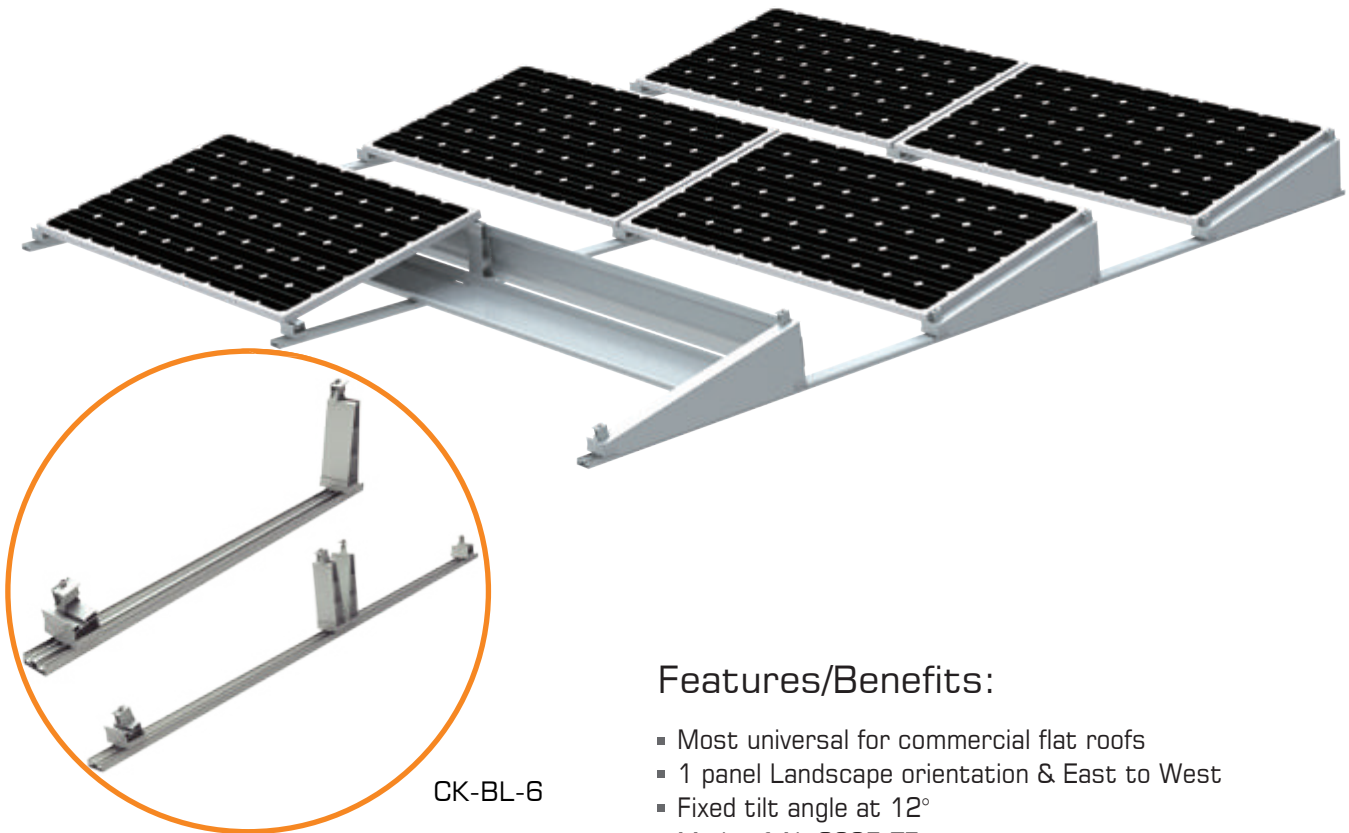


### Features/Benefits:

- Most universal for commercial flat roofs
- 1 panel Landscape orientation & East to West
- Fixed tilt angle at 12°
- Made of AL 6005-T5
- Highly class anodizing on surface treatment
- Only 1 tools installation needed for all fixing
- Pre-assembly
- Non-penetration to roof and light weight roof loading

## Ballast Placement Options

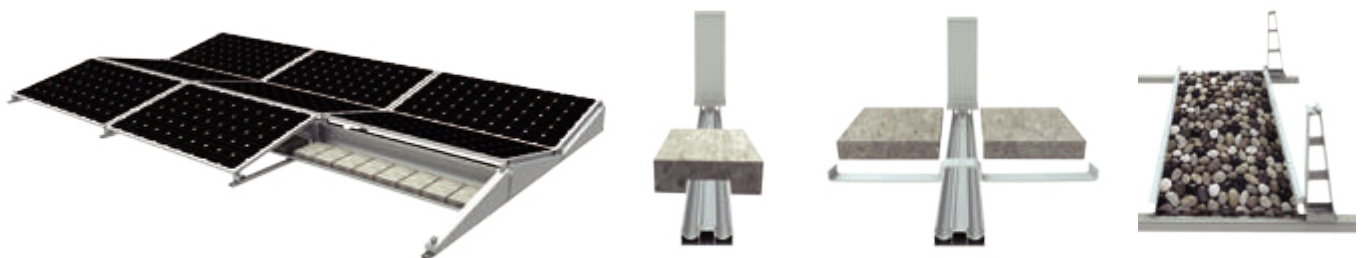

## Adjustable Aluminum Triangular Mount

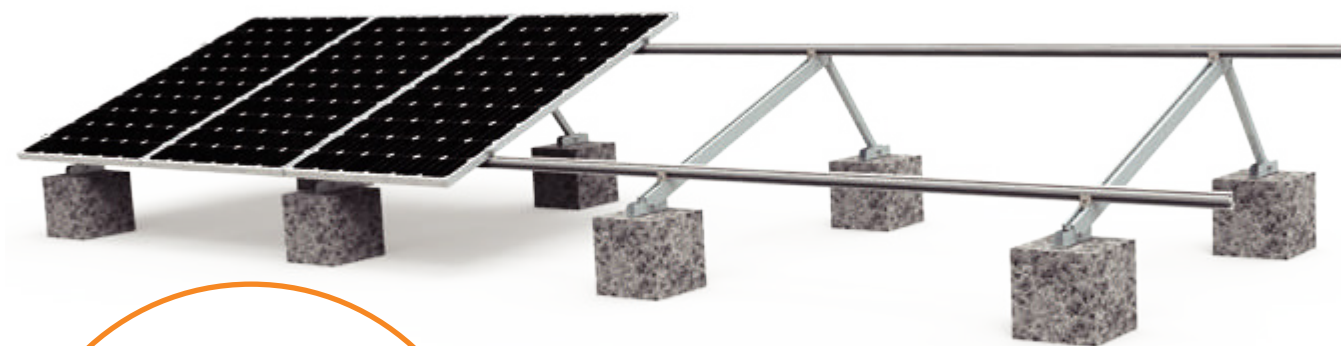


CK-ATT-BL



### Features/Benefits:



- Most cost-effective for commercial flat roofs
- 1 panel Portrait orientation
- 10°-30° tilted angle adjustable
- Made of AL 6005-T5
- Highly class anodizing on surface treatment
- Pre-assembly and foldable
- Non-penetration to roof and light weight roof loading

### Angel Adjustable by moving the concrete distance

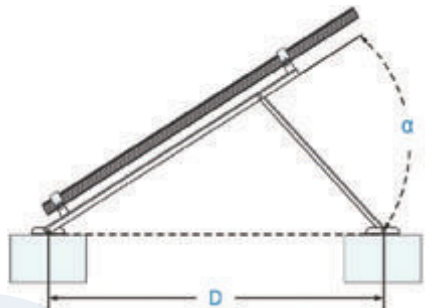

Degree	Concrete Distance(D/mm)
15°	1216
20°	1547
25°	1716
30°	1832

## Fixed Aluminum Triangular Mount

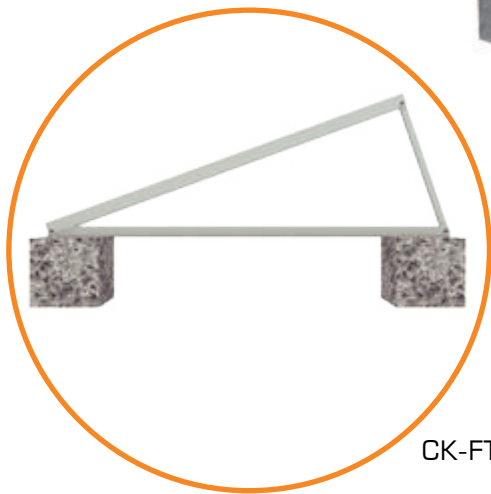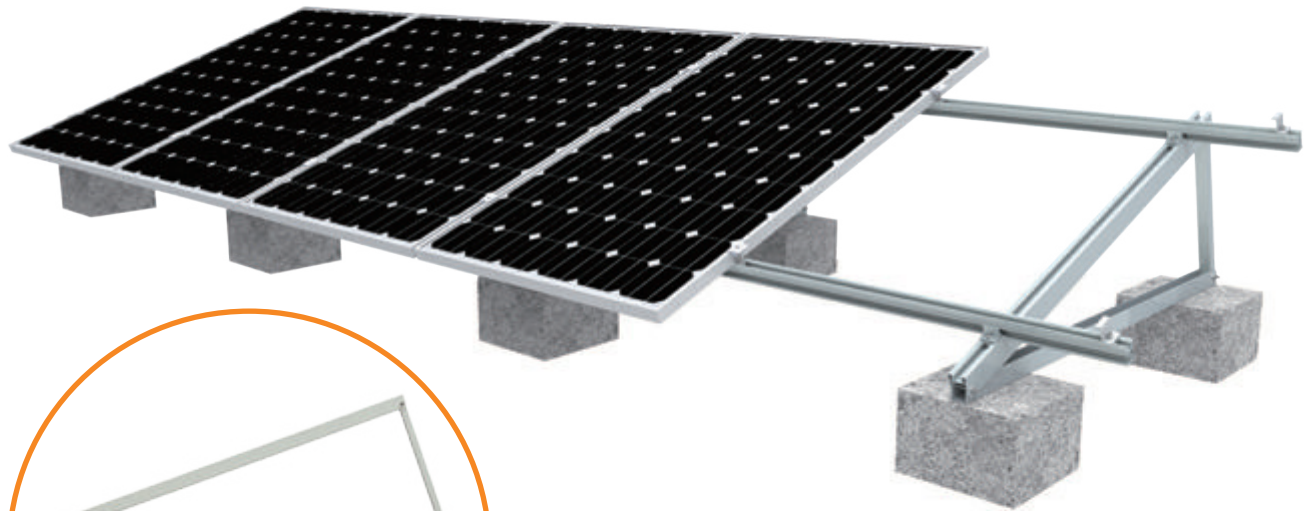


CK-FTT-BL



### Features/Benefits:

- Most universal for commercial flat roofs
- 1 panel Portrait orientation
- 10°, 15°, 20°, 25° tilted angle available
- Made of AL 6005-T5
- Highly class anodizing on surface treatment
- Pre-assembly and foldable
- Non-penetration to roof with Lower cost

## Tilt Mount On Metal Sheet

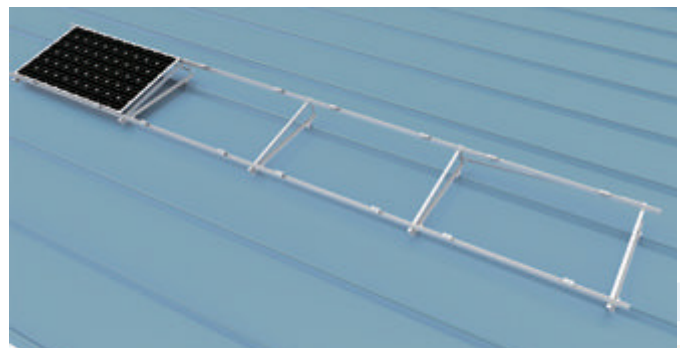











## Classic Rail #7

### Rail & Splice Kit



 <p>#7 Rail 4200,3200,2100mm</p>	 <p>Rail Splice Kit Spec:200mm</p>
 <p>Black #7 Rail 4200,3200,2100mm</p>	 <p>Black Rail Splice Kit Spec:200mm</p>









### Mid Clamp & End Clamp

 <p>Mid clamp: 30/33/35/38/40/45/50mm</p>	 <p>End clamp: 30/33/35/38/40/45/50mm</p>
 <p>Black mid clamp: 30/33/35/38/40/45/50mm</p>	 <p>Black end clamp: 30/33/35/38/40/45/50mm</p>
 <p>Adjustable mid clamp: 30/35/40/45/50mm</p>	 <p>Adjustable end clamp: 35/40/45/50mm</p>
 <p>Thin Film Mid Clamp 5.6-7.3mm</p>	 <p>Thin Film End Clamp 5.6-7.3mm</p>

## Infit Rail

### Rail & Splice Kit




 <p>#516 Rail 4200mm,3200mm,2100mm</p>	  <p>#516 Rail Splice Kit Spec:150mm</p>
 <p>#517 Rail 4200mm,3200mm,2100mm</p>	  <p>#517 Rail Splice Kit Spec:150mm</p>
 <p>#518 Rail 4200mm,3200mm,2100mm</p>	  <p>#518 Rail Splice Kit Spec:150mm</p>
 <p>#519 Rail 4200mm,3200mm,2100mm</p>	  <p>#519 Rail Splice Kit Spec:150mm</p>

### Mid Clamp & End Clamp

 <p>Mid clamp 30/33/35/38/40/45/50mm</p>	 <p>End Clamp 30/33/35/38/40/45/50mm</p>
 <p>Adjustable Mid Clamp 33-45mm</p>	 <p>Adjustable End Clamp 30-45mm</p>
 <p>Thin Film Mid Clamp 5.6-7.3mm</p>	 <p>Thin Film End Clamp 5.6-7.3mm</p>

## Aluminum T2VC Mount

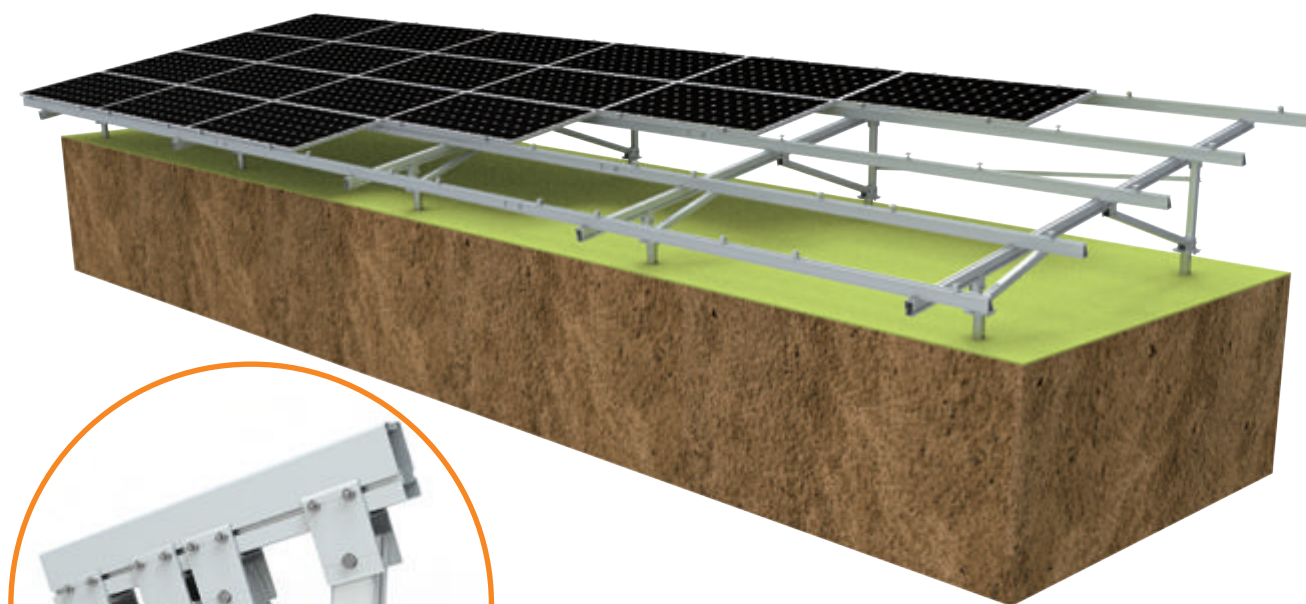


### Features/Benefits:


- "V" support design, improve the stability
- Pre-assembly and foldable
- Portrait or Landscape orientation
- Made of AL6005-T5, Highly class anodizing
- Customized arrays and height are possible
- Foundation works with Concrete & Ground Screw & Anchor




### Foundation Application

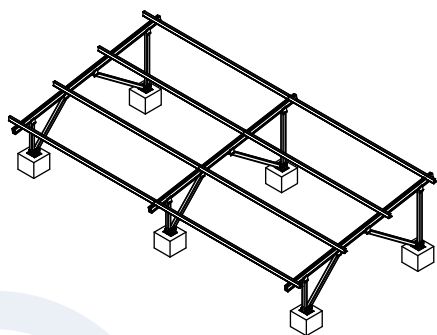

Concrete

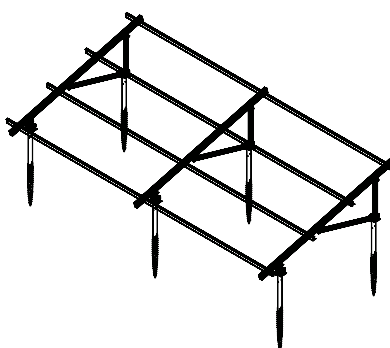

Ground screw



Anchor

## Steel U2V Mount




### Features/Benefits:

- "V" support design, improve the stability
- Pre-assembly and foldable
- Portrait or Landscape orientation
- Made of Q235B/Q355B, Hot Dip galvanizing
- Customized arrays and height are possible
- Foundation works with Concrete & Ground Screw & Anchor




## Height Customization

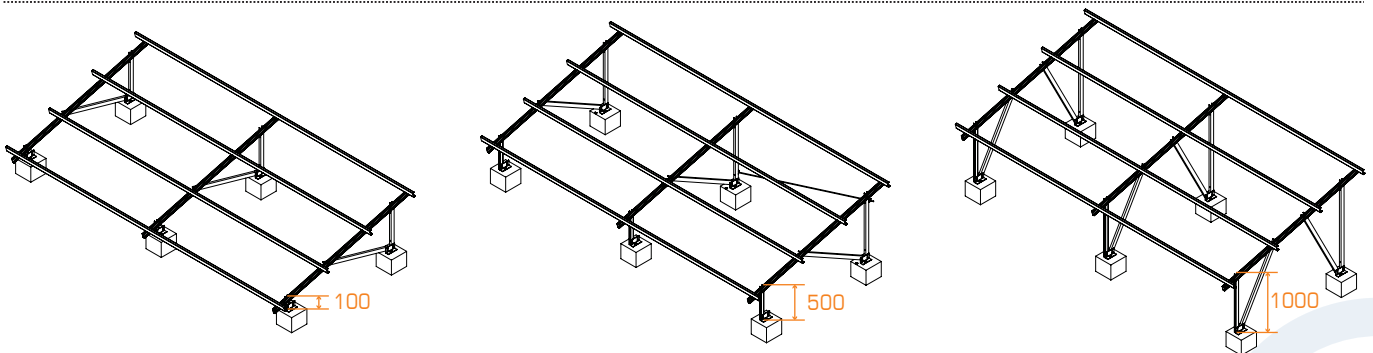





## Steel Pipe Mount

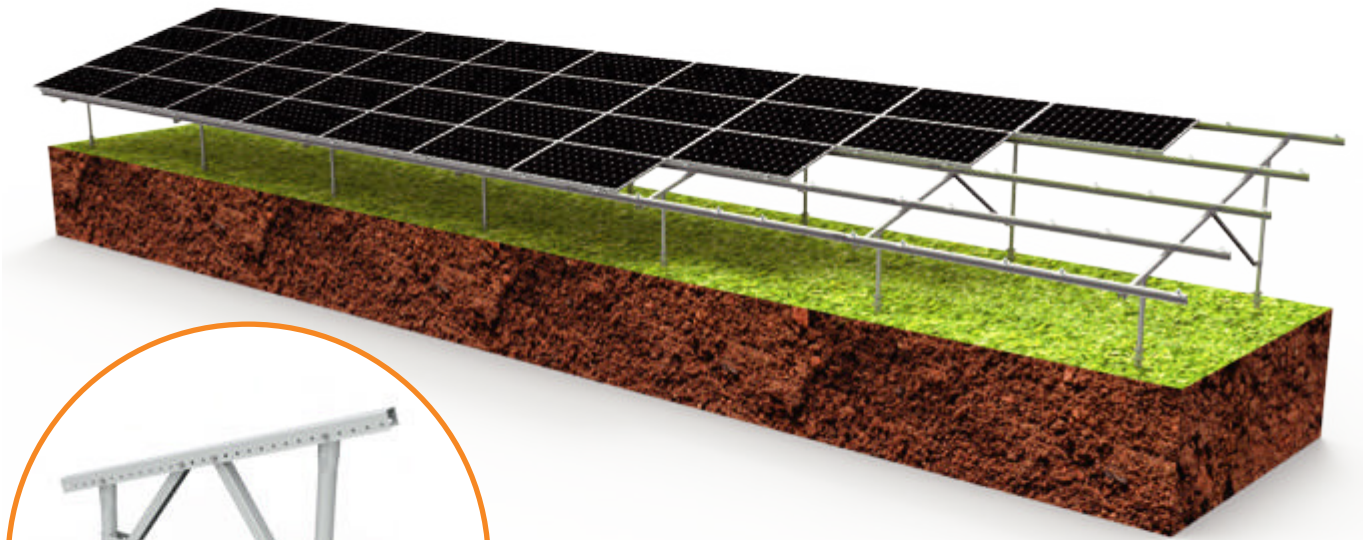

### Features/Benefits:

- Specially pipe support
- Pre-assembly and foldable
- Portrait or Landscape orientation
- Made of Q235B/Q355B, Hot Dip galvanizing
- Customized arrays and height are possible
- Foundation works with Concrete & Ground Screw & Anchor

## Foundation Application

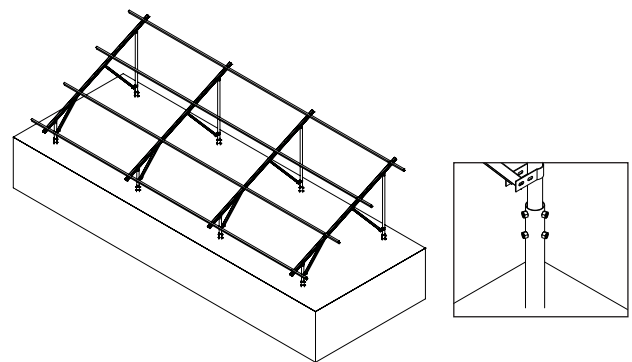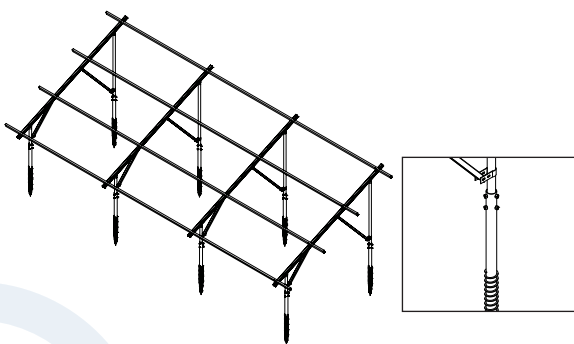

## Pile-Driven Mount




### Features/Benefits:



- Ramming Installation concept
- Effective for large scale solar plant
- Portrait or Landscape orientation
- Both aluminum and steel are options
- Customized arrays and height are possible
- Foundation with pile only or combined with cement pouring




### Angle Adjustable



### Larger Arrays

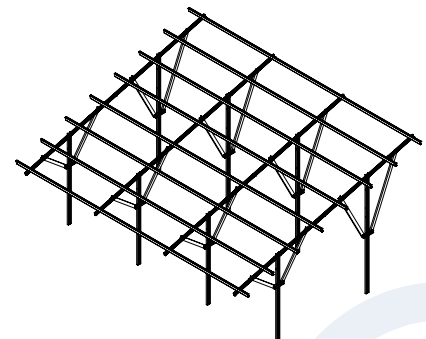


## Single Pole Carport

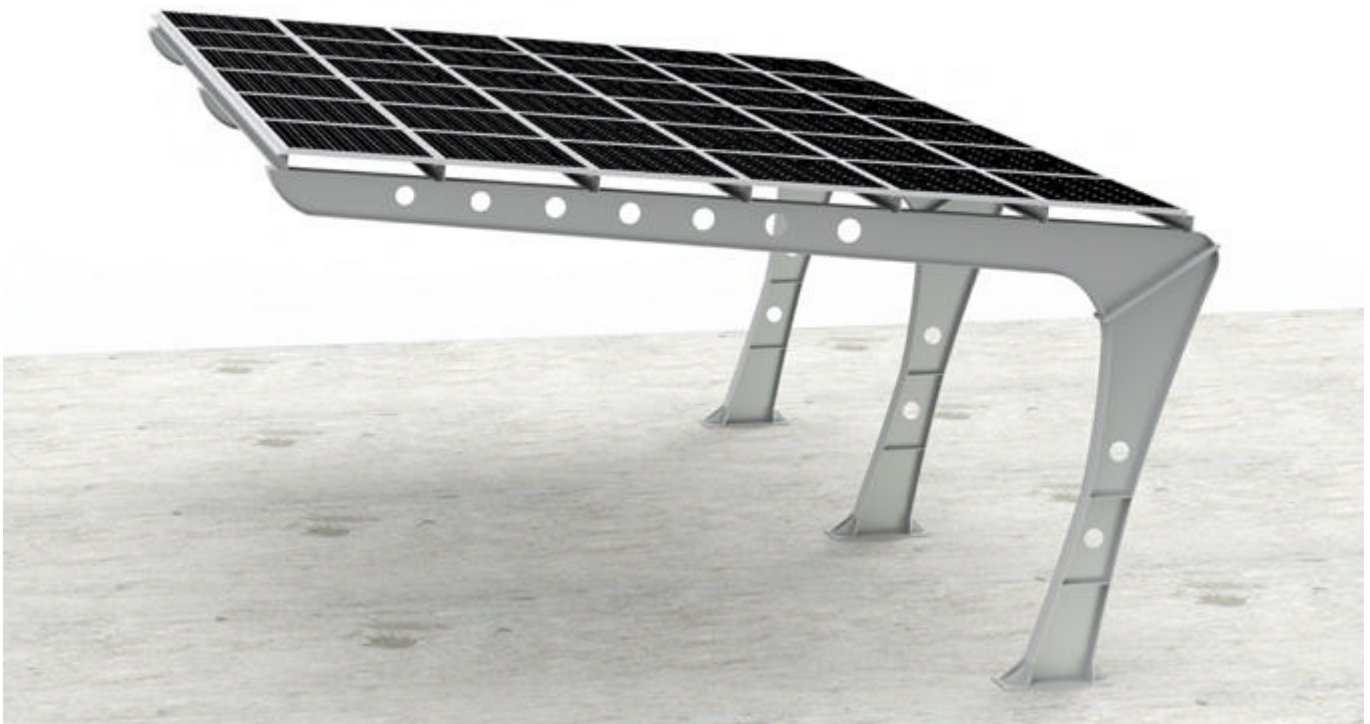


### Features/Benefits:

- Mostly used for commercial parking lots
- Single pole, No obstacles between cars
- Portrait or Landscape orientation
- Made of Q355B, Hot Dip galvanizing or painting
- Double sides parking is available
- Water-proof option is provided
- Customized arrays and height are possible
- Strong calculation supported

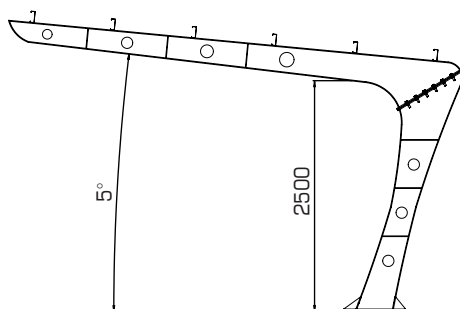


1 Side Parking

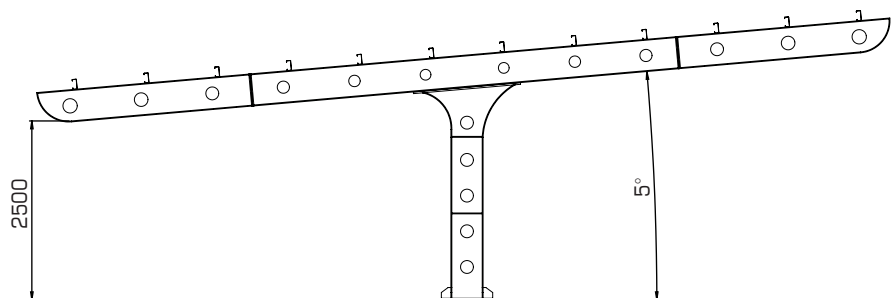


2 Sides Parking

## Four Poles Carport

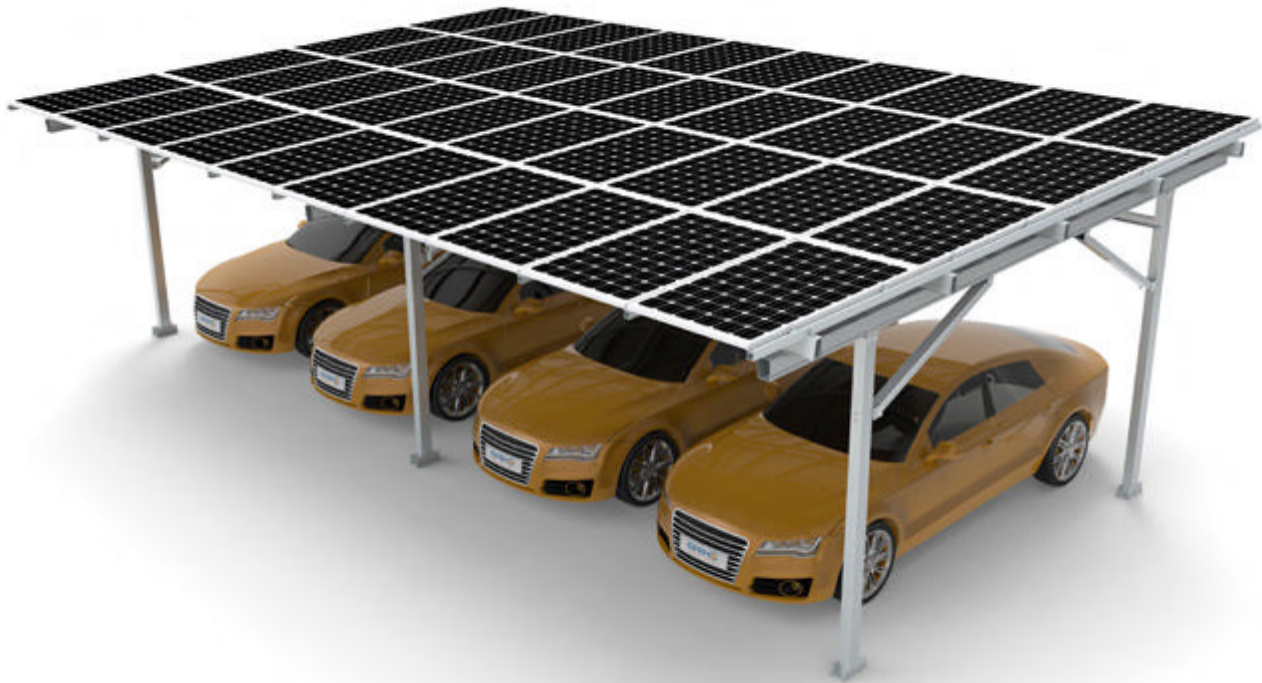


### Features/Benefits:

- Mostly used for home parking lots
- Four Poles, 2 cars parking
- Portrait or Landscape orientation
- Both aluminum and steel are available
- Effective and convenient on installation
- Water-proof option is provided
- Customized arrays and height are possible
- Strong calculation supported

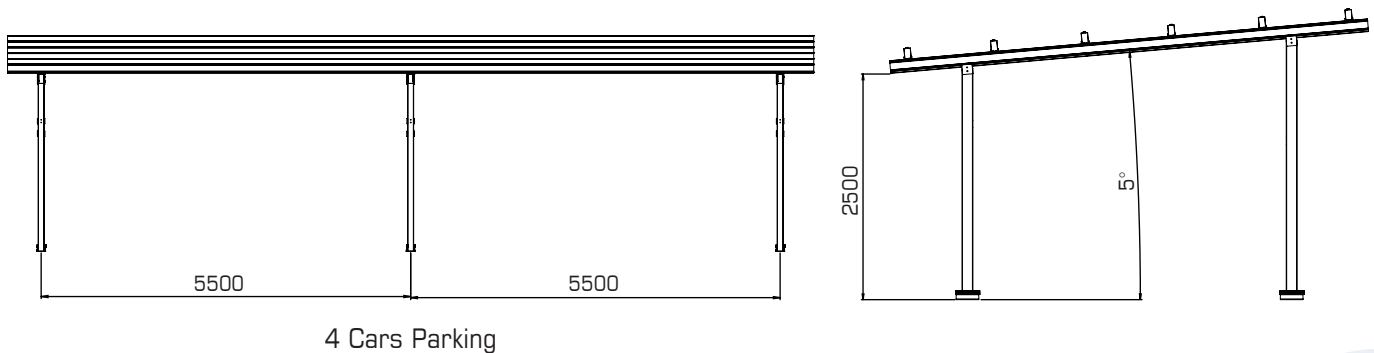



## Adjustable Steel Ground Mount



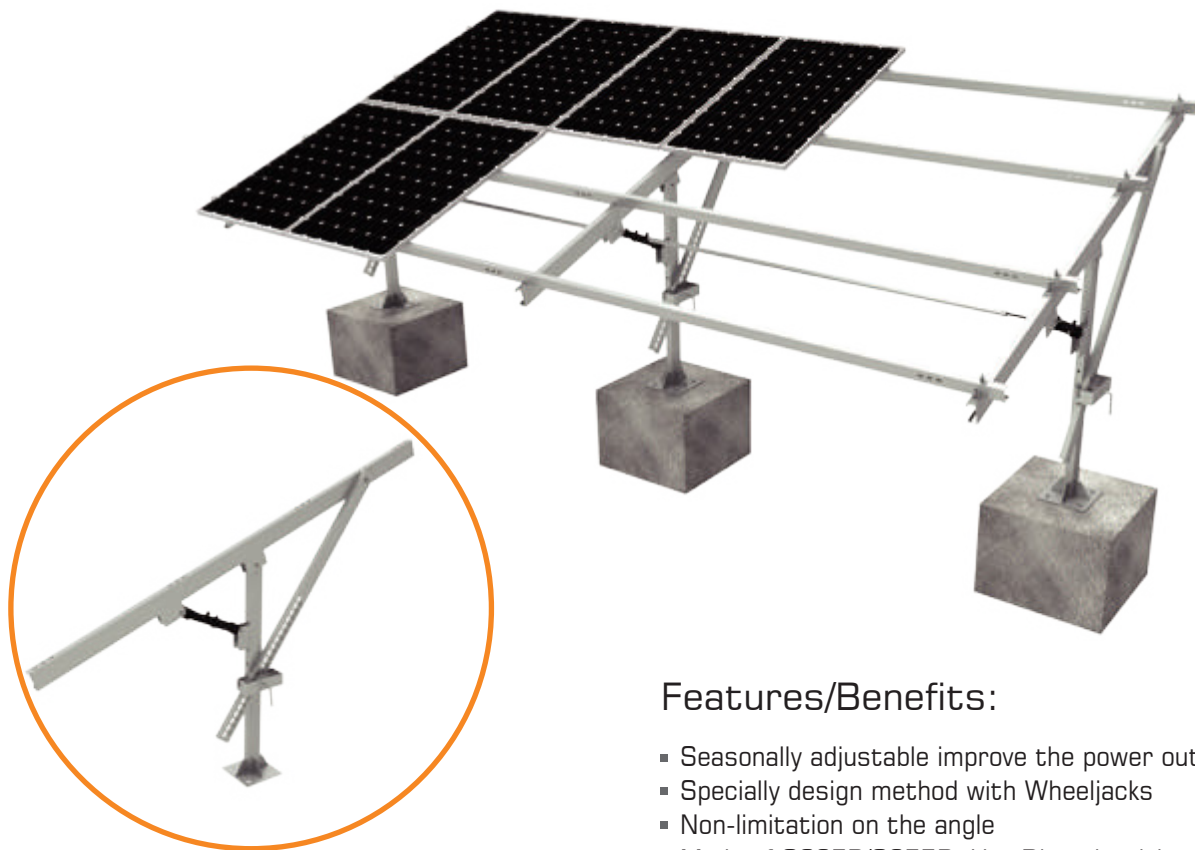


### Features/Benefits:

- Seasonally adjustable improve the power output
- Specially design method with Wheeljacks
- Non-limitation on the angle
- Made of Q235B/Q355B, Hot Dip galvanizing
- Foundation works with both Concrete & Pile
- Enable the adjusting capacity 4MW/2persons per day



## Customize Design

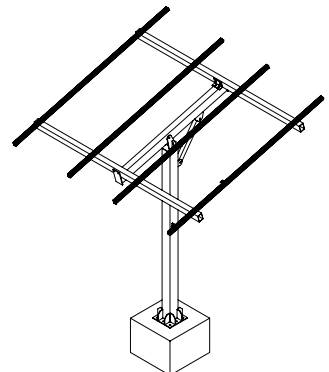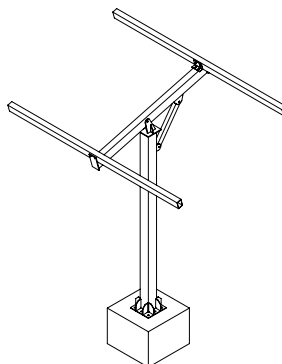
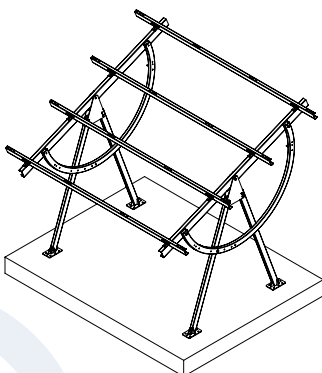


This product is designed to bond solar PV modules to mounting structures and create an electrical path to ground.

## Earthing Clip



		CK-GTC-R3A CHIKO Grounding Clip (Open 8.5mm)
		CK-GTC-R3B CHIKO Grounding Clip (Closed 8.5mm)
		CK-GTC-R3C CHIKO Grounding Clip (Open 12mm)
		CK-GTC-R3D CHIKO Grounding Clip (Circle closed 8.5mm)
		CK-GTC-R3E CHIKO Grounding Clip for Adjustable Mid Clamp (Open 8.5mm)
		CK-GTC-R3F CHIKO Grounding Clip Closed 8.5mm for Ground Mount Mid Clamps
		CK-GTC-R3G CHIKO Grounding Clip For T Mid Clamps
		CK-GTC-R1 CHIKO Bonding Jumper
		CK-592-1 CHIKO Grounding Lug
		CK-FSC-ECP01-205 CHIKO Bonding Jumper between Panels

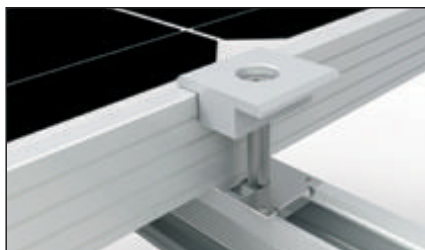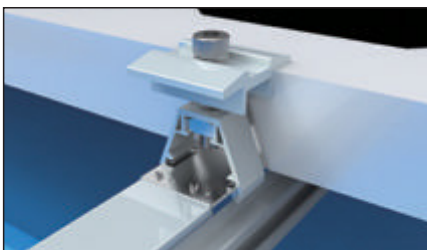

Ground screw type I with flange I

·Material steel Q235B

·High class hot galvanized 80μ

Item No.	Diameter (mm)	Length(mm)	Thickness(mm)
CK-GS-F1-1200-3.0T	76	1200	3.0
CK-GS-F1-1600-3.0T	76	1600	3.0
CK-GS-F1-2000-3.0T	76	2000	3.0
CK-GS-F1-2500-3.0T	76	2500	3.0
CK-GS-F1-1200-3.5T	76	1200	3.5
CK-GS-F1-1600-3.5T	76	1600	3.5
CK-GS-F1-2000-3.5T	76	2000	3.5
CK-GS-F1-2500-3.5T	76	2500	3.5

Ground screw type I with flange II

·Material steel Q235B

·High class hot galvanized 80 μ

Item No.	Diameter (mm)	Length(mm)	Thickness(mm)
CK-GS-F2-1200-3.0T	76	1200	3.0
CK-GS-F2-1600-3.0T	76	1600	3.0
CK-GS-F2-2000-3.0T	76	2000	3.0
CK-GS-F2-2500-3.0T	76	2500	3.0
CK-GS-F2-1200-3.5T	76	1200	3.5
CK-GS-F2-1600-3.5T	76	1600	3.5
CK-GS-F2-2000-3.0T	76	2000	3.5
CK-GS-F2-2500-3.0T	76	2500	3.5

Ground screw type II with flange I

·Material steel Q235B

·High class hot galvanized 80 μ

Item No.	Diameter(mm)	Length(mm)	Thickness(mm)
CK-GSY-76F1-24-1200-3.0T	76	1200	3.0
CK-GSY-76F1-24-1600-3.0T	76	1600	3.0
CK-GSY-76F1-24-2000-3.0T	76	2000	3.0
CK-GSY-76F1-24-2500-3.0T	76	2500	3.0
CK-GSY-76F1-24-1200-3.5T	76	1200	3.5
CK-GSY-76F1-24-1600-3.5T	76	1600	3.5
CK-GSY-76F1-24-2000-3.5T	76	2000	3.5
CK-GSY-76F1-24-2500-3.5T	76	2500	3.5

Ground screw type II with flange II

·Material steel Q235B

·High class hot galvanized 80 μ

Item No.	Diameter(mm)	Length(mm)	Thickness(mm)
CK-GSY-76F2-24-1200-3.0T	76	1200	3.0
CK-GSY-76F2-24-1600-3.0T	76	1600	3.0
CK-GSY-76F2-24-2000-3.0T	76	2000	3.0
CK-GSY-76F2-24-2500-3.0T	76	2500	3.0
CK-GSY-76F2-24-1200-3.5T	76	1200	3.5
CK-GSY-76F2-24-1600-3.5T	76	1600	3.5
CK-GSY-76F2-24-2000-3.5T	76	2000	3.5
CK-GSY-76F2-24-2500-3.5T	76	2500	3.5



Adjustable ground screw type I without flange

- Material steel Q235B
- High class hot galvanized 80μ

Item No.	Diameter(mm)	Length(mm)	Thickness(mm)
CK-GST-76N-1200-3.0T	76	1200	3.0
CK-GST-76N-1600-3.0T	76	1600	3.0
CK-GST-76N-2000-3.0T	76	2000	3.0
CK-GST-76N-2500-3.0T	76	2500	3.0
CK-GST-76N-1200-3.5T	76	1200	3.5
CK-GST-76N-1600-3.5T	76	1600	3.5
CK-GST-76N-2000-3.5T	76	2000	3.5
CK-GST-76N-2500-3.5T	76	2500	3.5



Adjustable ground screw type II without flange

- Material steel Q235B
- High class hot galvanized 80 μ

Item No.	Diameter(mm)	Length(mm)	Thickness(mm)
CK-GST-N16-1200-3.0T2	76	1200	3.0
CK-GST-N16-1600-3.0T2	76	1600	3.0
CK-GST-N16-2000-3.0T2	76	2000	3.0
CK-GST-N16-2500-3.0T2	76	2500	3.0
CK-GST-N16-1200-3.5T2	76	1200	3.5
CK-GST-N16-1600-3.5T2	76	1600	3.5
CK-GST-N16-2000-3.5T2	76	2000	3.5
CK-GST-N16-2500-3.5T2	76	2500	3.5



Adjustable ground screw flange I

- Material steel Q235B
- High class hot galvanized 80 μ

Item No.	Diameter(mm)	Length(mm)	Thickness(mm)
CK-AFP-76F1-500-3.0T	200	500	3.0
CK-AFP-76F1-800-3.5T	200	800	3.5



Adjustable ground screw flange II

- Material steel Q235B
- High class hot galvanized 80 μ

Item No.	Diameter(mm)	Length(mm)	Thickness(mm)
CK-AFP-76F2-500-3.0T	200	500	3.0
CK-AFP-76F2-800-3.5T	200	800	3.5



Anchor foundation

- Material steel Q235B
- High class hot galvanized 80 μ

Item No.	Description
CK-NK-03Anchor foundation with	3 pipes
CK-NK-06Anchor foundation with	9 pipes
CK-NK-12Anchor foundation with	12 pipes





## Cable Clip



CK-FSC-CP1/2/3

- CK-FSC-CP1** Solar cable clips 2.5 Hold one or two 2.5mm<sup>2</sup> solar cable
- CK-FSC-CP2** Solar cable clips 4.0 Hold one or two 4.0mm<sup>2</sup> solar cable
- CK-FSC-CP3** Solar cable clips 6.0 Hold one or two 6.0mm<sup>2</sup> solar cable

- Package 8000 PCS/CTN
- Weight 17.6 kg
- Made from stainless steel SUS304



CK-FSC-CP4/5

- CK-FSC-CP4** Solar cable clips 90°/180° 4.0 Hold one or two 4.0mm<sup>2</sup> solar cable
- CK-FSC-CP5** Solar cable clips 90°/180° 6.0 Hold one or two 6.0mm<sup>2</sup> solar cable

- Package 8000 PCS/CTN
- Weight 17.6 kg
- Made from stainless steel SUS304



CK-FSC-CP6

- CK-FSC-CP6** Solar cable clips to hold 3-4 cables, 3cables/6mm<sup>2</sup>; 4cables/4mm<sup>2</sup>


- Package 8000 PCS/CTN
- Weight 17.6 kg
- Made from stainless steel SUS304



CK-FSC-CP7/8

- CK-FSC-CP7** Solar cable clips 4.0 Hold four 4.0mm<sup>2</sup> solar cable for thin-film module
- CK-FSC-CP8** Solar cable clips 6.0 Hold four 6.0mm<sup>2</sup> solar cable for thin-film module

- Package 2400 PCS/CTN
- Weight 5.3 kg
- Made from stainless aluminum 6005-T5

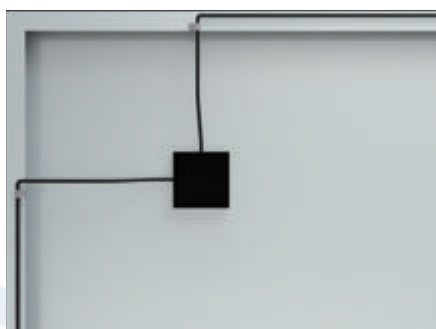

CK-FSC-CP1/2/3/4/5



CK-FSC-CP6




CK-FSC-CP7

## Stainless steel cable tie

- Various length available
- Stainless Steel SUS304
- Unique buckle locking mechanism
- Fast & easy installation

Material in high quality SUS304			
Item	Width (mm)	Length (mm)	Package (pcs/pkg)
CK-FSC-TA-150	4.6	150	100
CK-FSC-TA-200	4.6	200	100
CK-FSC-TA-250	4.6	250	100
CK-FSC-TA-300	4.6	300	100
CK-FSC-TA-350	4.6	350	100

- Package 5000 PCS/CTN

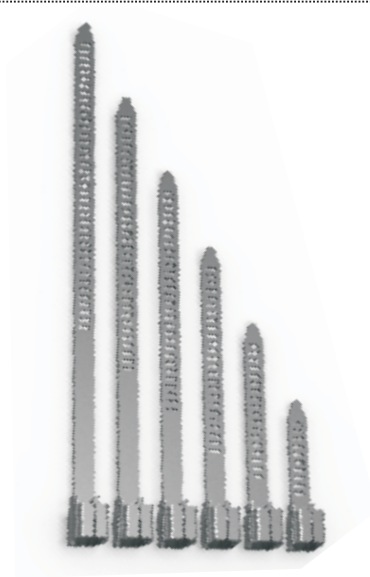

## PV Connector

CK-0807-A/B CK-0807-3A/3B CK-0808-A/B CK-0808-3A/3B  
PV Junction Box adopts crowned spring and has automatic locking mechanism on plugs to ensure solid connection between contact and connector. Connector plug (negative) is equipped with buttons that are symmetric at the bottom to ensure the convenience of removal. Such removal does not need any extra instruments, therefore, can make sure that the plug is intact.

This advanced product, with easy usage, is more convenient to use than similar products. In addition, the product also confirms to DIN V VDE V 0126-3.



### PV CONNECTOR



CK-0807-A/B-02  
MC4 Single Connector  
500 SETS/PKG



CK-0807-2A/2B-02  
MC4 2-Branch Connector  
100 SETS/PKG




CK-0807-3A/3B-02  
MC4 3-Branch Connector  
100 SETS/PKG

## PV Cable

### CHIKO Photovoltaic Cable

- Conductor : Tinned annealed copper
- Insulation : 120°CXLPE, black
- Jacket : 120°CXLPE, black
- voltage 600/1000V temperature 120°C
- Specifically designed for connecting photovoltaic system components inside and outside of building and equipment with high mechanical requirements and extreme weather conditions . For permanent installations.
- Cable made of electron-beam cross-linked insulation and coating; high resistance against heat, cold, oil, abrasion, ozone, UV and weather; with improved reaction in case of fire; low smoke, halogen free, flame free, flame retardant; flexible, easy to strip, very low space requirement, extremely mechanically robust, very long lifetime.

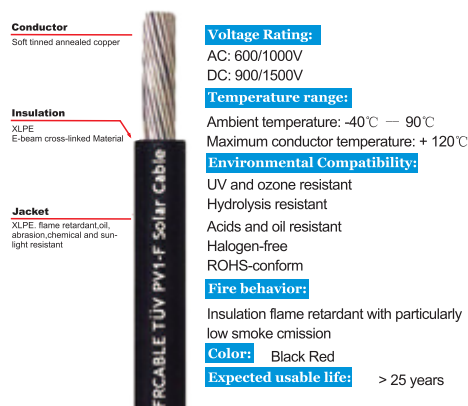

### Construction

Type	Conductor		Insulation Standard Thickness	Insulation Standard Dia.	Jacket Standard Thickness	Outer Dia.	Conductor resistance (20°C)	Max. Current Carrying Capacity
	Construction	Conductor Dia.						
mm <sup>2</sup>	N/mm	(about)mm	mm	mm	mm	mm	Ω/KM	Apm
1.5	30/0.25±0.006	1.58	0.90	3.38 ± 0.1	1.10	5.5 ± 0.2	13.7	30
2.5	50/0.25±0.006	2.04	0.85	3.74 ± 0.1	0.90	5.5 ± 0.2	8.21	41
4.0	56/0.30±0.006	2.59	0.85	4.29 ± 0.1	0.90	6.10±0.2	5.09	55
6.0	84/0.30±0.006	3.17	0.85	4.87 ± 0.1	1.05	7.0±0.2	3.39	70

### Electrical Properties

Item	Units	Specification
Conductor resistance ( 20°C )	Ω / km	—
Insulation resistance ( 90°C )	Ω / cm	≤ 10 <sup>11</sup>
Withstand voltage	V / 5min	AC6500
Lifetime	Year	≤ 25years
Min.Bending Radius		5D



### CHIKO Photovoltaic Cable

Item	Description	Package(Meter/Roll)
CK-0809-1.5	Solar cable 1.5mm <sup>2</sup>	250
CK-0809-2.5	Solar cable 2.5mm <sup>2</sup>	250
CK-0809-4.0	Solar cable 4.0mm <sup>2</sup>	100
CK-0809-6.0	Solar cable 6.0mm <sup>2</sup>	200
CK-0809-10.0	Solar cable 10.0mm <sup>2</sup>	100



# PROJECTS REFERENCE

**CHIKOUSA**  
RACKING MADE SIMPLE











Project Size: 2KW Installation Site: USA



Project Size: 10KW Installation Site: China



Project Size: 5KW Installation Site: USA



Project Size: 10MW Installation Site: India



Project Size: 50MW Installation Site: China



Project Size: 1.3MW Installation Site: Nicaragua



Project Size: 400KW Installation Site: Japan



Project Size: 300KW Installation Site: Japan



Project Size: 12KW Installation Site: Netherlands



Project Size: 60KW Installation Site: Lebanon



Project Size: 500KW Installation Site: China




Project Size: 78KW Installation Site: South Africa

# WORLDLEADING

---

## M A N U F A C T U R E

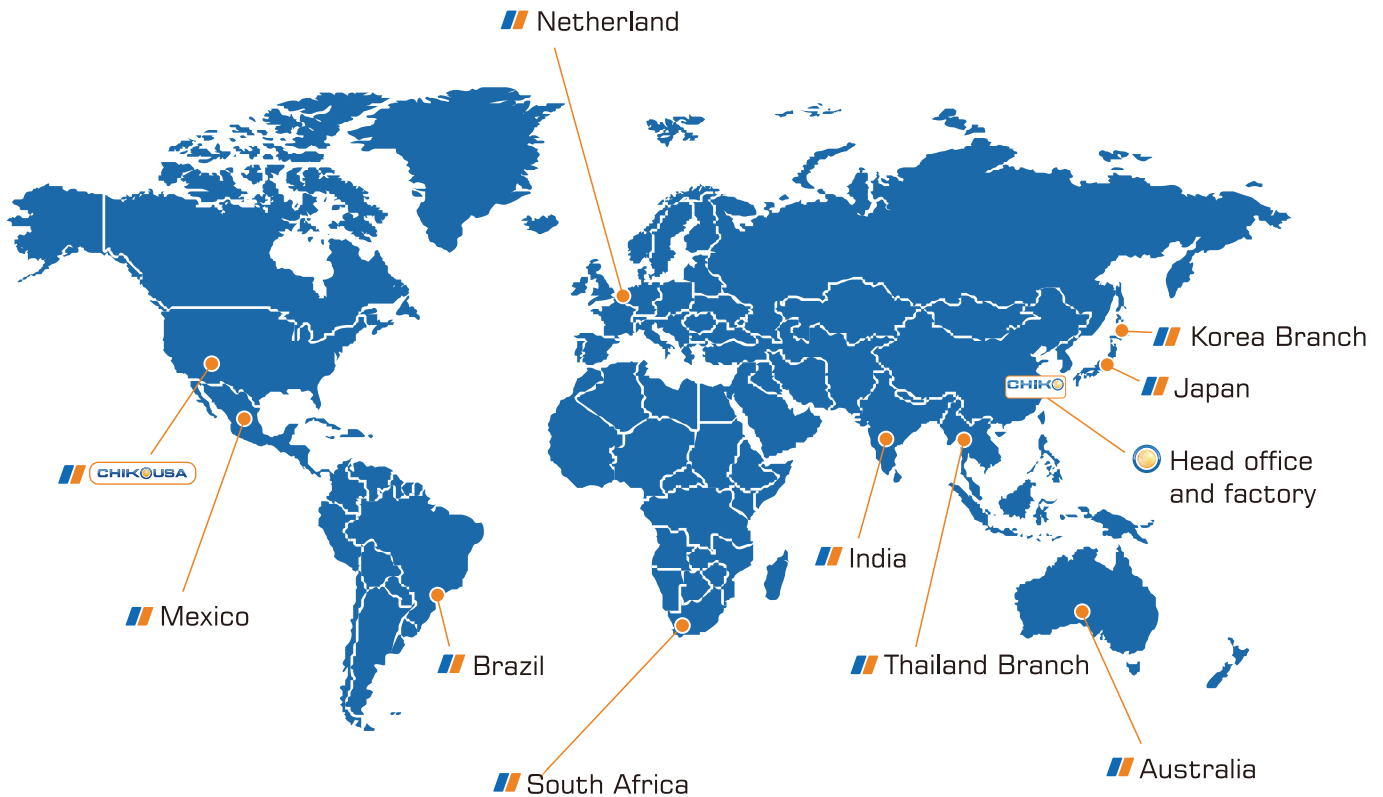

**CHIKOUSA**  
RACKING MADE SIMPLE

Tel : 1-800-948-5390

Email : [info@chikousa.com](mailto:info@chikousa.com)

**[www.chikousa.com](http://www.chikousa.com)**



101 East Baseline Road  
Buckeye, AZ 85326